
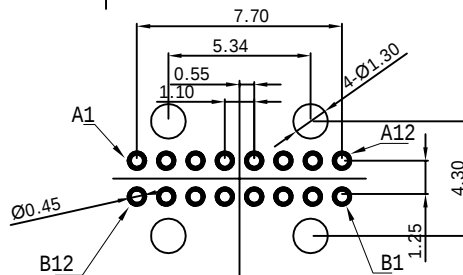
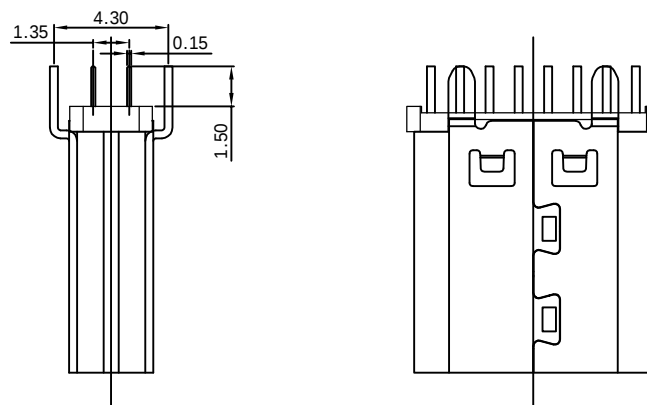
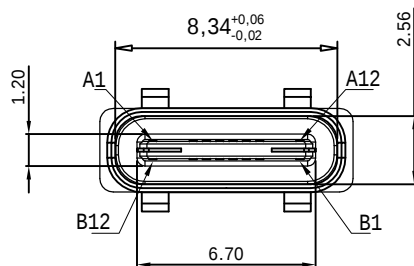
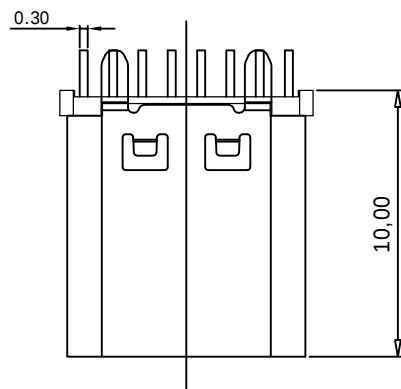


RoHS COMPLIANT

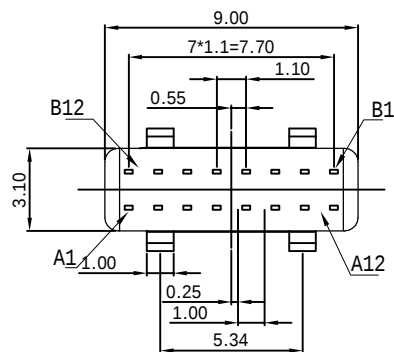

RECOMMENDED P.C.B. LAYOUT
TOLERANCE UNSPECIFIED $\pm 0.05\text{mm}$

备注:

1. 材质:
 - 1.1 胶芯: LCP+30%G.F UL94V-0
 - 1.2 端子: 磷铜, T=0.12mm; 镍底, 镀金1μ"m
 - 1.3 外壳: 不锈钢, T=0.30mm; 表面镀镍100μ"m或亮锡100μ"m
2. 主要特性:
 - 2.1 额定电流: 3A
 - 2.2 接触阻抗: 30mΩ MAX
 - 2.3 绝缘阻抗: 100MΩ MIN 250V DC
 - 2.4 耐压测试: 250V AC
 - 2.5 沾锡性: 温度250±5℃, 时间5±0.5s
 - 2.6 整体插入力: 3.57kgf MAX
整体拔出力: 1.02kgf MIN
 - 2.7 使用寿命: 5000次
 - 2.8 工作温度: -30℃ ~ +80℃

Pin	Signal Name	Mating Sequence	Pin	Signal Name	Mating Sequence
A1	GND	First	B12	GND	First
A2			B11		
A3			B10		
A4	V _{BUS}	First	B9	V _{BUS}	First
A5	CC1	Second	B8	SBU2	Second
A6	Dp1	Second	B7	Dn2	Second
A7	Dn1	Second	B6	Dp2	Second
A8	SBU1	Second	B5	CC2	Second
A9	V _{BUS}	First	B4	V _{BUS}	First
A10			B3		
A11			B2		
A12	GND	First	B1	GND	First
SHELL		GND	SHELL		GND

Part number Information:

DW-MUB-CF016821-XX TR-01

Contact Plating _____
01: Gold Flash Plating on Mating Area
03: 3u" Gold Plating on Mating Area
05: 5u" Gold Plating on Mating Area
15: 15u" Gold Plating on Mating Area
30: 30u" Gold Plating on Mating Area
TR: Tape Reel _____
TP: Tray Packing
Series _____
01-99 _____

						Angle	±2°	DESIGN	Aple	2021.10.15		 龍威電子有限公司 Dragon Well Electronics Co.,Ltd	
						X.	±0.40		CHECK	Jason	2021.10.15		
						X.X	±0.35	APPROVAL		Rix	2021.10.15		TITLE:
	A-0	2021.10.15	NEW	Michael	Rix	X.XX	±0.30						MODEL NO.
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4 	SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	