

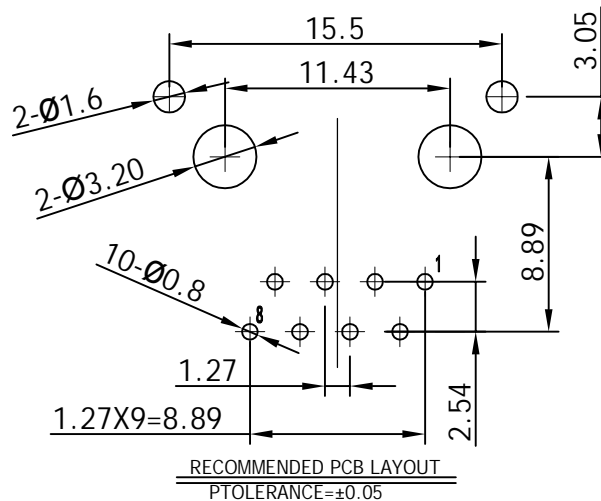
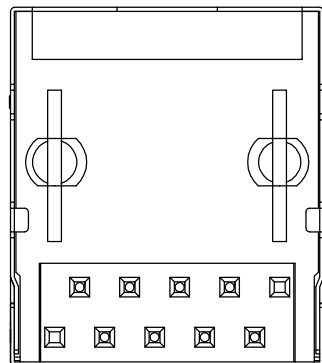


RoHS COMPLIANT

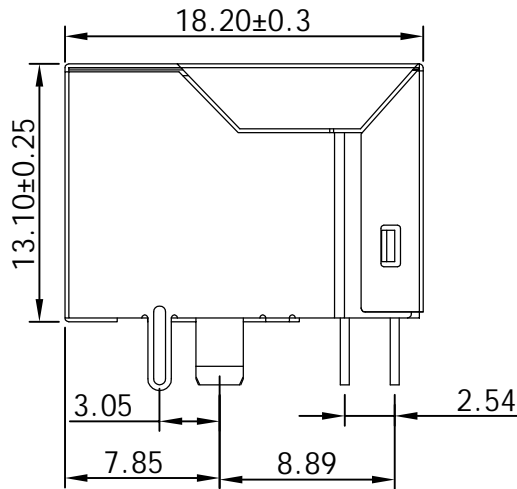

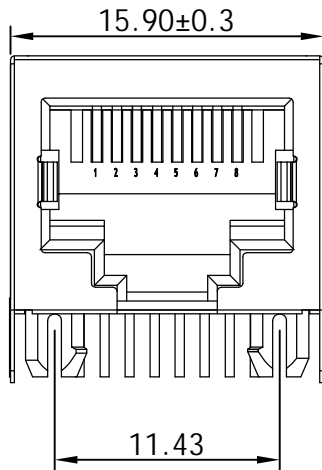

MATERIAL:  
HOUSING : PA46/PA66,UL94V-0,BLACK.  
TERMINAL: PHOSPHOR BRONZE  
GOLD PLATING ON CONTACT AREA  
SHIELD: C2680, NICKEL PLATING  
MECHANICAL:  
DURABILITY: 750 CYCLES MIN,12.5MM/MINUTE.  
INSERTION FORCE: 2.2KG.F MAX.  
OPERATING TEMPERATURE: -40℃~+85℃.  
STORAGE TEMPERATURE: -40℃~+85℃.  
ELECTRICAL:  
VOLTAGE: 125 VOLTS AC.  
CURRENT RATING : 1.5AMP.  
DIELECTRIC STRENGTH: 1000 VAC RMS 50HZ OR 60HZ,1MIN.  
INSULATION RESISTANCE: 500 MEGA OHMS MIN. INITIAL  
AFTER500V DC FOR 1 MINUTE.  
CONTACT RESISTANCE: SINGLE TERMINAL 40 MILLIOHMS MAX.  
INITIAL 60 MILLIOHMS MAX. AFTER DURABILITY TEST.  
REFLOW SOLDERING TEMPERATURE:255±5℃.

Part number Information:  
DW-RJ45-D001836-XX TP -XX

Terminal Plating  
01: Gold Flash Plating on Mating Area  
03: 3u" Gold Plating on Mating Area  
06: 6u" Gold Plating on Mating Area  
15: 15u" Gold Plating on Mating Area  
30: 30u" Gold Plating on Mating Area  
TP: Tray Packing

Housing Material:  
01: PA46  
02: PA66

						Angle	±2°	DESIGN	Aple	2022.11.13		 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd		
						X.	±0.40	CHECK	Jason	2022.11.13			TITLE:	RJ45 TAB-Down 1X1
						X.X	±0.35	APPROVAL	Rix	2022.11.13			MODEL NO.	DW-RJ45-D001836-XXTP-XX
	A-0	2022.11.13	NEW	Michael	Rix	X.XX	±0.30							
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4		SHEET: 1 of 4	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	