

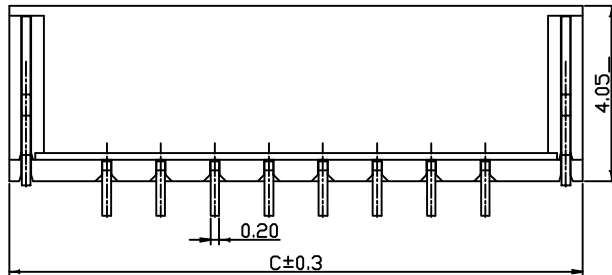



RoHS COMPLIANT

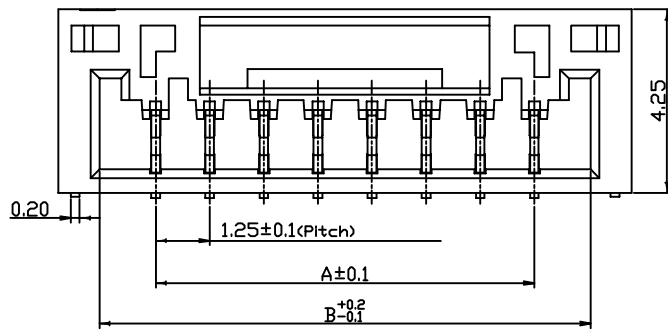

SPECIFICATION

1. Current Rating : 1A AC,DC
2. Voitage rating : 50V AC,DC ;
- 3.Contact resistance: 30mΩ Max;
- 4.Insulation resistance: 100MΩ Min;
- 5.Withstand voltage: 500V AC/Minutc;
- 6.Temperature range: -25°C~+85°C

Material:

- 1.Insulator:PA6T/LCP UL 94V-0
- 2.Contact: Phosphor Bronze
- 3.Plating: Tin

Total PINS	Dimension mm		
	A	B	C
02	1.25	3.85	5.75
03	2.50	5.10	7.00
04	3.75	6.35	8.25
05	5.00	7.60	9.50
06	6.25	8.85	10.75
07	7.50	10.10	12.00
08	8.75	11.35	13.25
09	10.0	12.60	14.50
10	11.25	13.85	15.75
11	12.50	15.10	17.00
12	13.75	16.35	18.25
13	15.00	17.60	19.50
14	16.25	18.85	20.75
15	17.50	20.10	22.00

Part number Information:

DW-WF-1 125218WRNP-31 TR - 01
Single Row
Pitch 1.25mm
Total PINS
Connector Plating
01:Gold Flash
03:3u" Gold
06:6u" Gold
15:15u" Gold
30:30u" Gold
31:Sn
32:Ni
TR:Tape Reel
ISeries
01-99

						Angle	±2°	DESIGN	Aple	2017.11.26	 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd	
						X.X	±0.35	CHECK	Jason	2017.11.26	TITLE: 1.25mm Wafer Single Row SMT Type卧貼	
						X.XX	±0.30	APPROVAL	Rix	2017.11.26	MODEL NO. DW-WF-1125218WRNP-31TR-01	
	A-0	2017.11.26	NEW	Michael	Rix	X.XXX	±0.15				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4 	SHEET: 1 of 1	