RoHS COMPLIANT

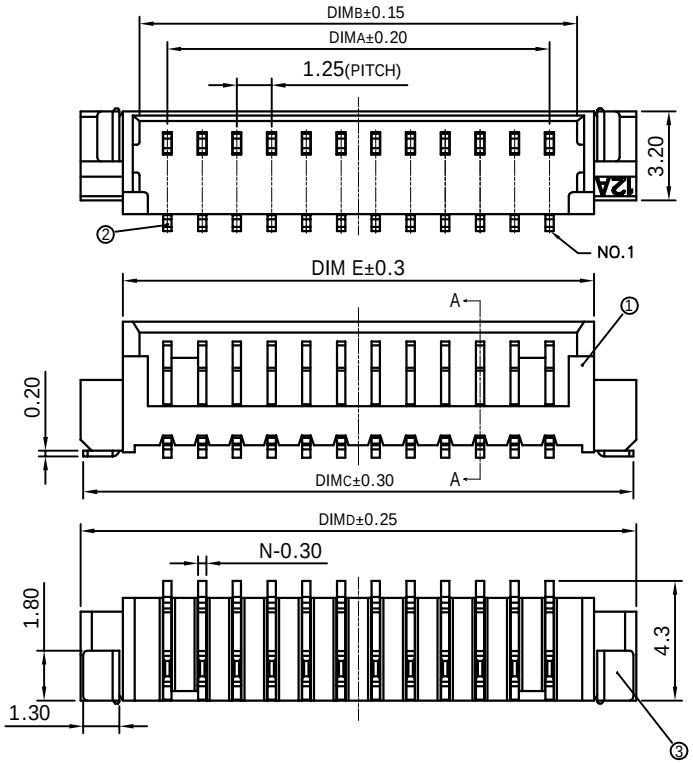

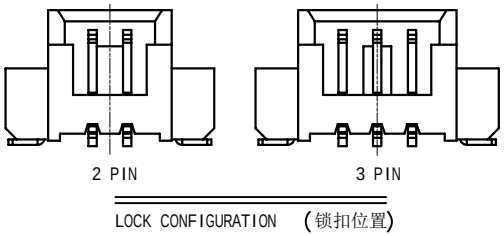





SECTION A-A

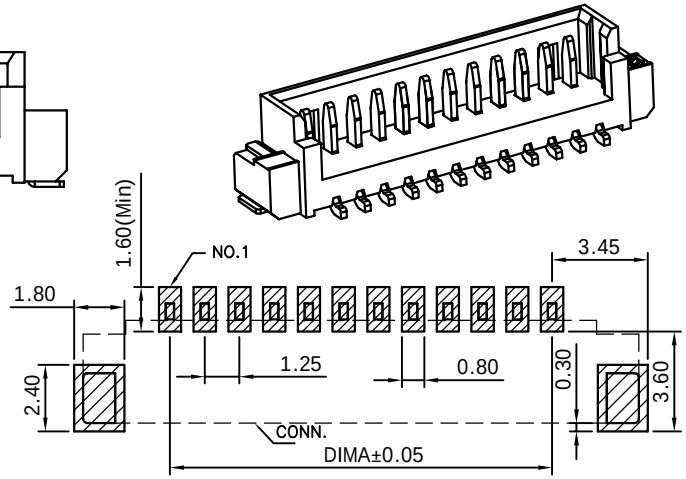

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE±0.05

Poles	Dimension mm				
	A	B	C	D	E
02	1.25	3.25	7.30	7.50	4.45
03	2.50	4.50	8.55	8.75	5.70
04	3.75	5.75	9.80	10.00	6.95
05	5.00	7.00	11.05	11.25	8.20
06	6.25	8.25	12.30	12.50	9.45
07	7.50	9.50	13.55	13.75	10.70
08	8.75	10.75	14.80	15.00	11.95
09	10.00	12.00	16.05	16.25	13.20
10	11.25	13.25	17.30	17.50	15.70

Specifications
Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Insulation Resistance: 100M Ω Min.
Withstanding Voltage: 500V AC/Minute.
Contact Resistance: 20mΩ Max.
Operating Temperature:-25°C to +85°C
Lock Configuration：2 to 3Pin is 1，≥4Pin is 2

Materials
Terminal: Phosphor Bronze/Tin over Nickel
Soder Tabs: Phosphor Bronze/Tin over Nickel
Housing: LCP UL94V-0 (Natural color)

Part number Information:

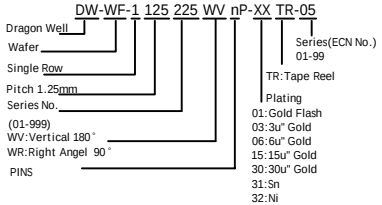

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
	A-0	2023.09.21	New	Aple	Rix

GENERAL TOLERANCE UNLESS OTHERWISE NOTED

Angle	±2°
X.X	±0.30
X.XX	±0.20
X.XXX	±0.10

DESIGN	Aple	2023.09.21
CHECK	Jason	2023.09.21
APPROVAL	Rix	2023.09.21

SCALE: N/A UNIT:mm A4 SHEET: 1 of 1

龍威電子有限公司
Dragon Well Ele Dragon Well Electronics Co.,Ltd

TITLE: 1.25mm SMT 立貼 Wafer
MODEL NO. DW-WF-1125225WVnP-XXTR-05

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETAPY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION