
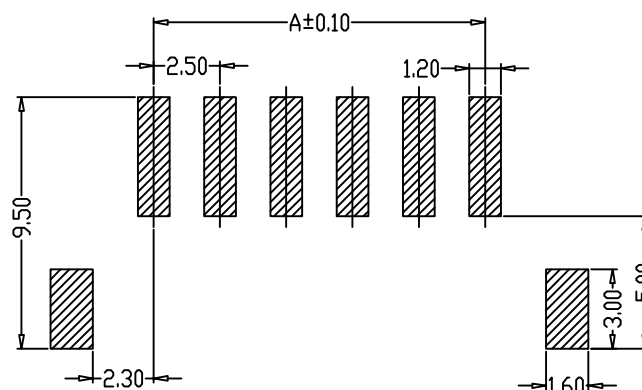
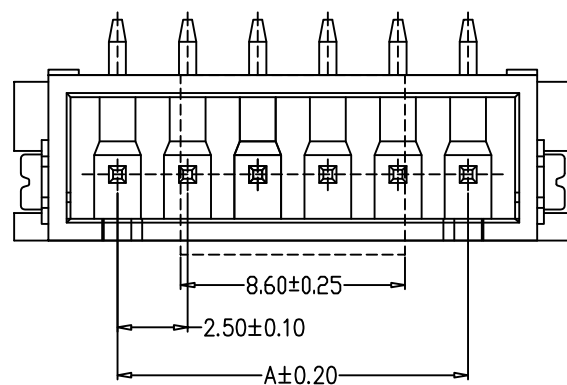
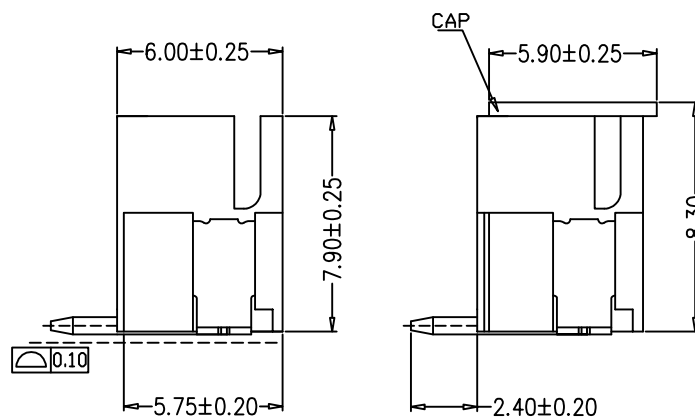


RoHS COMPLIANT

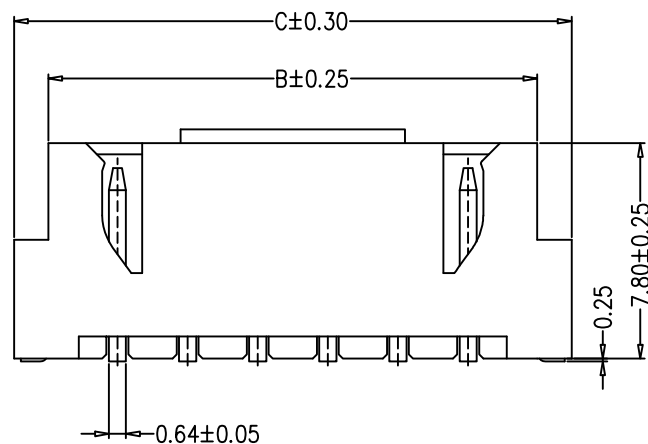

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE ± 0.05

Specifications

Voltage Rating:250V AC DC

Current Rating: 3A AC DC

Insulation Resistance:1000MΩ Min.

Dielectric Withstanding: 1000V AC/ minute.

Contact Resistance: 20mΩ Max.

Operating Temperature:-25° C to +85° C

Materials

Contact Material: Brass Tin Plated

Insulator Material: LCP UL 94V-0

PINS.	Dimension		
	A	B	C
02	2.50	7.50	10.00
03	5.00	10.00	12.50
04	7.50	12.50	15.00
05	10.00	15.00	17.50
06	12.50	17.50	20.00
07	15.00	20.00	22.50
08	17.50	22.50	25.00
09	20.00	25.00	27.50
10	22.50	27.50	30.00
11	25.00	30.00	32.50
12	27.50	32.50	35.00
20	47.50	52.50	55.00

Part number Information:

DW-WF-1 25088WVNP-31 TR- 01

Single Row

Pitch 2.50mm

Total PINS

Connector Plating

01:Gold Flash

03:3u" Gold

15:15u^m Gold

30:30u" Gold

31:Sn

32: Ni
TD: Tene Pool

TR: Tape Reel
IC: Integrated Circuit

Series
01-99

						Angle	±2°	DESIGN	Aple	2016.09.08		 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd		
						X.X	±0.30	CHECK	Jason	2016.09.08			TITLE:	PH 2.50 SMT 180° Wafer
						X.XX	±0.20	APPROVAL	Rix	2016.09.08			MODEL NO.	DW-WF-125088WVnP-31TR-01
	A-0	2016.09.08	NEW	Aple	Rix	X.XXX	±0.15							
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4 	SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		