

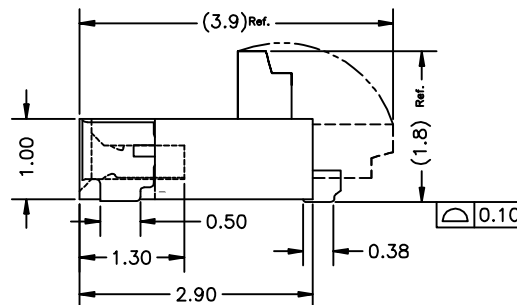
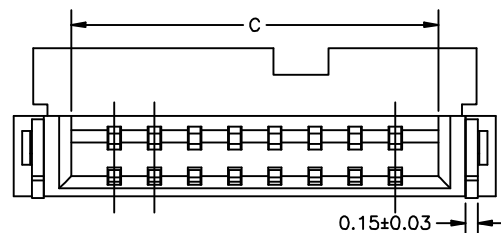
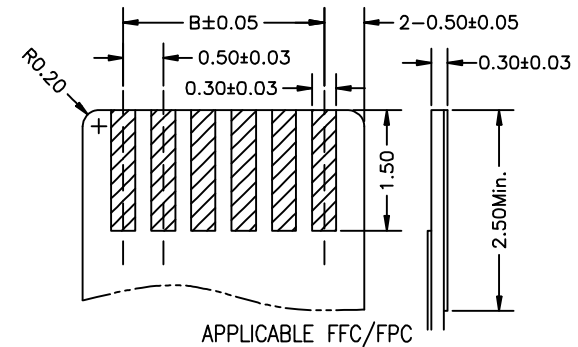
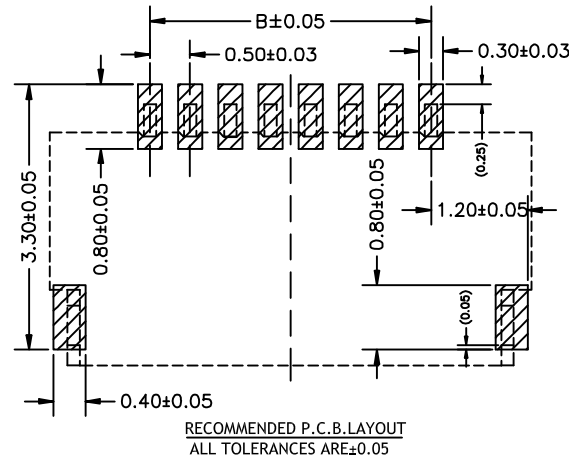


RoHS COMPLIANT

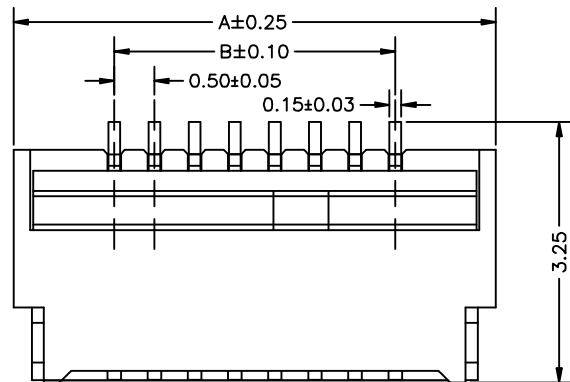

Voltage Rating : 50V AC/DC
Current Rating : 0.4A AC,DC
Withstand Voltage : 500V AC/minute
Contact Resistance : 30mΩ(MAX.)
Insulation Resistance : 100MΩ(MIN.)
Temperature Range : -55°C~+85°C


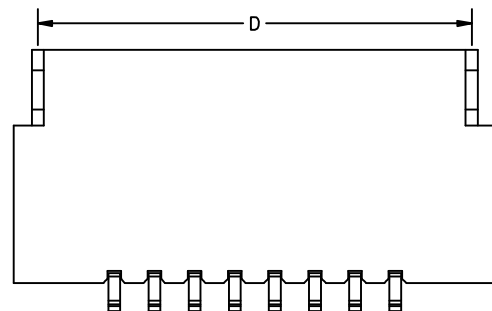


Part number Information:

DW-FPC- S0510 nP-XX TR - 01
Pitch 0.5mm
Total PINS
Connector Plating
01:Gold Flash
03:3u" Gold
06:6u" Gold
15:15u" Gold
30:30u" Gold
31:Sn
32:Ni
Cable:
01:T=0.3mm
TR:Tape Reel

Dimensional Information:

Part No.	Dimensions			
	A	B	C	D
4P	4.00	1.50	2.57	3.40
5P	4.50	2.00	3.07	3.90
6P	5.00	2.50	3.57	4.40
8P	6.00	3.50	4.57	5.40
10P	7.00	4.50	5.57	6.40
12P	8.00	5.50	6.57	7.40
14P	9.00	6.50	7.57	8.40
16P	10.00	7.50	8.57	9.40
18P	11.00	8.50	9.57	10.40
20P	12.00	9.50	10.57	11.40
22P	13.00	10.50	11.57	12.40
24P	14.00	11.50	12.57	13.40
26P	15.00	12.50	13.57	14.40
28P	16.00	13.50	14.57	15.40
30P	17.00	14.50	15.57	16.40
32P	18.00	15.50	16.57	17.40
34P	19.00	16.50	17.57	18.40
36P	20.00	17.50	18.57	19.40
38P	21.00	18.50	19.57	20.40
40P	22.00	19.50	20.57	21.40
45P	24.50	22.00	23.07	23.90
50P	27.00	24.50	25.57	26.40

						Angle	±2°	DESIGN	Aple	2015.01.05		 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd		
						X.	--	CHECK	Jason	2015.01.05				
						X.X	±0.20							
						X.XX	±0.15	APPROVAL	Rix	2015.01.05				
						X.XXX	--							
	A-0	2015.01.05	NEW		Aple	Rix						TITLE:	0.5P 1.0H FPC(BACK-FLIP)-CUST	
												MODEL NO.	DW-FPC-S0510nP-XXTR-01	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4		SHEET: 1 of 2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	