
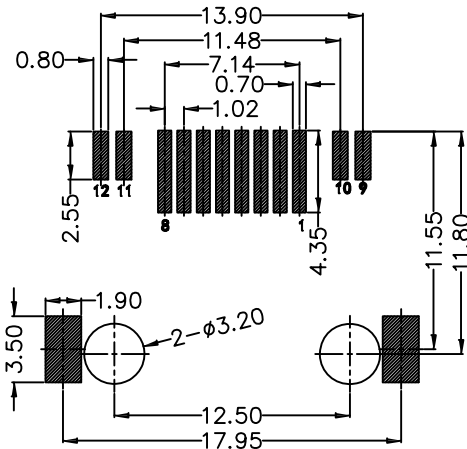
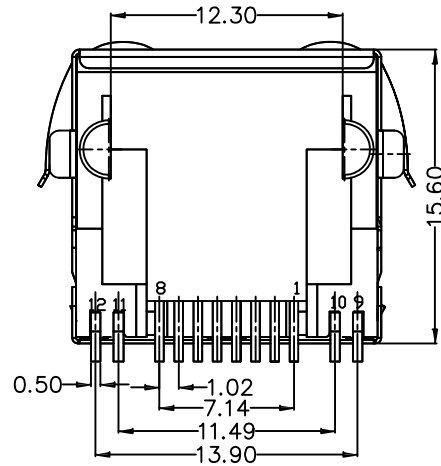
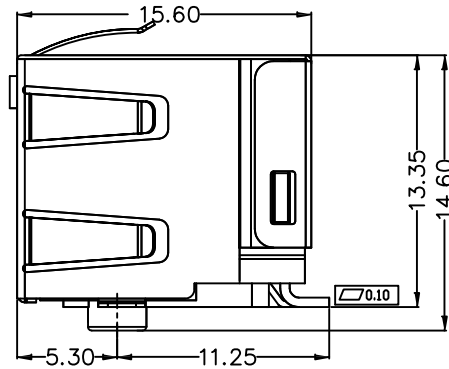



RoHS COMPLIANT

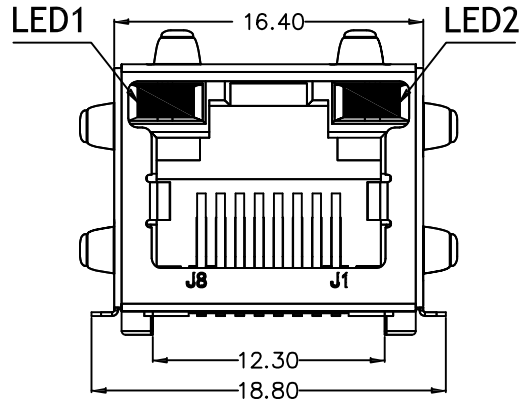

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE ±0.05


SPECIFICATION

- 1.Rating:AC 125V 1.5A.
 - 2.Contact resistance≤50mΩ.
 - 3.Insulation resistance:500MΩ(DC 500V).
 - 4.Withstanding voltage:500V AC 50Hz /mins'
- ELECTRONICS:
- 1.Housing Material: LCP UL94V-0.
 - 2.Contact Material: Phosphor Bronze T=0.30mm
 3. Contact Plating: Plating SEE Part Number
 - 4.Shield:C2680 T=0.2mm Nickel Plating on all Area.
 4. Durability: 750 cycles Min.
- ENVIRONMENTAL:
1. STORAGE TEMPERATURE : -40°C~+85°C RELATIVE
 2. OPERATION TEMPERATURE : -40°C~+85°C

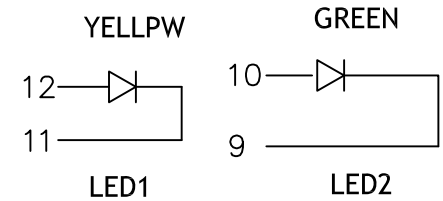

LED Specification

Standard LED Color	LED Wavelength	Foward(A)	Foward(V)
Green	568nm	20mA	1.8 5-2.45V
Yellow	585nm	20mA	1.7-2.2V

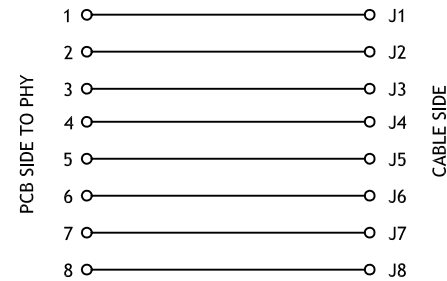


Part number Information:

DW-RJ45 -S001202 -XX XX -XX

Connector Plating
01:Gold Flash Plating on Contact Area
03:3u" Gold Plating on Contact Area
05:5u" Gold Plating on Contact Area
15:15u" Gold Plating on Contact Area
30:30u" Gold Plating on Contact Area

TR:Tape Reel
TP:Tray Packing

Series
01:W/O LED
02: LED1 GREEN LED2 YELLOW
03:LED1 YELLOW LED2 GREEN

						Angle	±2°	DESIGN	Aple	2016.08.10		 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd		
						X.	±0.30	CHECK	Jason	2016.08.10				
						X.X	±0.25		APPROVAL	Rix	2016.08.10			
	A-0	2016.08.10	NEW	Michael	Rix	X.XX	±0.20							TITLE:
												MODEL NO.	DW-RJ45-S001202-XXXX-XX	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4		SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	