

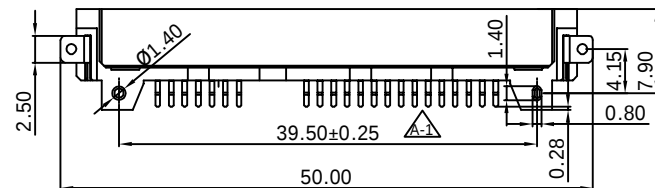

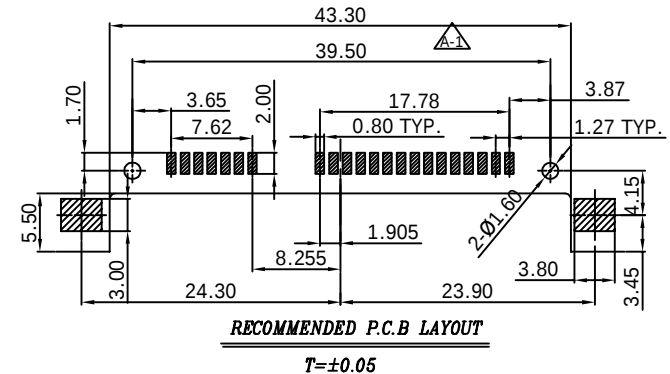



RoHS COMPLIANT

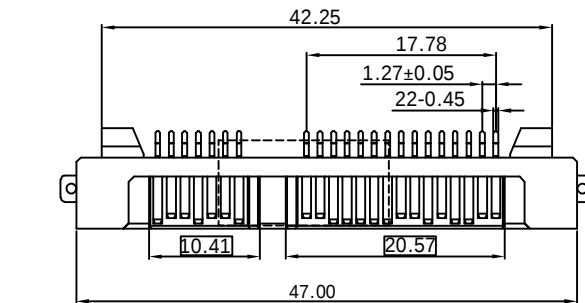

Part number Information:

DW-SAT-S22575-XX TP -01

Terminal Plating
01:Gold Flash Plating Mating Area
03:3u" Gold Plating Mating Area
06:6u" Gold Plating Mating Area
15:15u" Gold Plating Mating Area
30:30u" Gold Plating Mating Area

Series
01-99

TR:Tape Reel
TB:Tube package
TP:Tray Packing

NOTE:

1.MATERIAL:

HOUSING: LCP 30% G/F UL 94V-0 ;BLACK
CONTACT: C2680R-H,T=0.25±0.01mm
PEG:C2680R-H,T=0.30±0.02mm

2.MECHANICAL:

MATING: 45N MAX.
WITHDRAWAL FORCE: 10N MIN.
DURABILITY: 500 CYCLES.

3.ELECTRICAL:



CURRENT RATING: 1.5 A
CONTACT RESISTANCE:30 Milliohms MAX.
INSULATION RESISTANCE: 1000 Megohms MIN.
WITHSTANDING VOLTAGE: 500 VAC

4.FINISH:

CONTACT: G/FGOLD . PLATING ON CONTACT AREA
100u". TIN PLATING ON SOLDER TAILS
50u" . NICKEL UNDERPLATING OVER ALL
PEG:100u" MIN. TIN PLATING ON SOLDER AREA
50u" MIN.NICKEL UNDERPLATING OVER ALL

5.ENVIRONMENTAL:

OPERATURE RANGE:-25°C TO +85°C

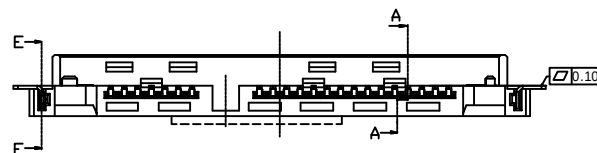

						Angle	±3°	DESIGN	Aple	2025.06.23		 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd	
						X.X	±0.38	CHECK	Jason	2025.06.23			
	A-1	2025.06.23	Update spec	Aple	Rix	X.XX	±0.25	APPROVAL	Rix	2025.06.23		TITLE:	SATA 7+15P SMT 沉板半包2.75正向
	A-0	2018.08.13	NEW	Aple	Rix	X.XXX	±0.13					MODEL NO.	DW-SAT-S22575-XXXX-01
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	