


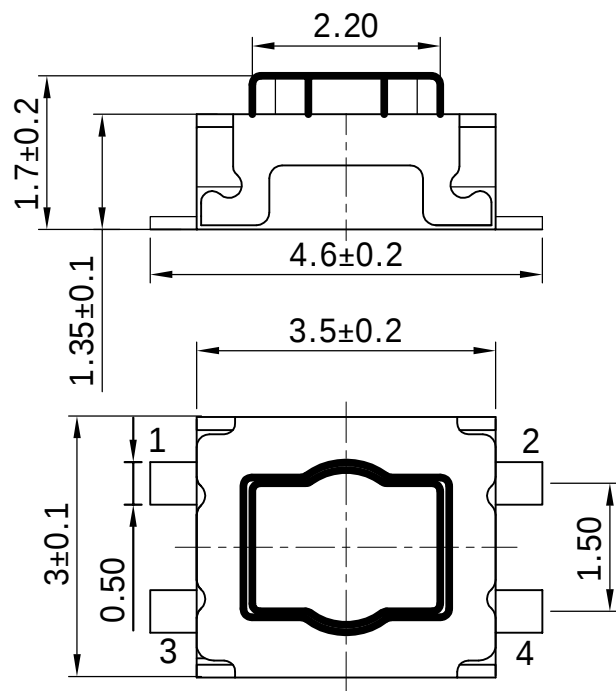
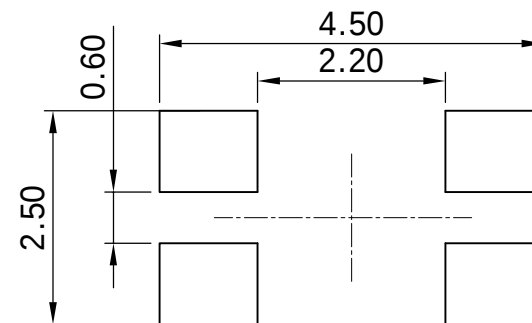


RoHS COMPLIANT

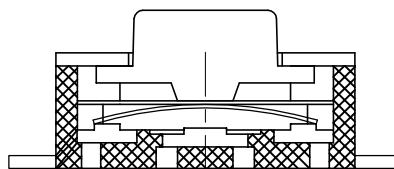

Circuit Diagram



RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

Remarks:

1. Rated current、Voltage: DC 12V 50mA
2. Contact resistance: $\leq 100\text{m}\Omega$
3. Insulation resistance: $\geq 100\text{M}\Omega$
4. The intensity of operations: $250 \pm 50\text{gf}$
5. Life requirements: 50,000 次
6. Withstand voltage: AC 250V 1分钟
7. Operating force: $0.13 \pm 0.1\text{mm}$.
8. Temperature range: $-30^{\circ}\text{C} \sim +85^{\circ}\text{C}$

Part number Information:

DW-TS-S060277A-01 TR -01

TYPE	01	
Operating Force	250±50gf	

TR:Tape Reel

Series
01-99

E	手柄	LCP	黑色
D	盖板	不锈钢	清洗
C	弹片	SUS301	单面镀银
B	基座	LCP	黑色
A	卡件	铜	镀银
序号	名称	材质	颜色/镀涂

						Angle	±2°	DESIGN	Aple	2018.09.05		 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd		
						X.	±0.50	CHECK	Jason	2018.09.05			TITLE:	Tact switch 3*4*1.7
						X.X	±0.35							
						X.XX	±0.25	APPROVAL	Rix	2018.09.05			MODEL NO.	DW-TS-S060277A-01TR-01
	A-0	2018.09.05	NEW		Aple	Rix	X.XXX					±0.20		
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4 	SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		