
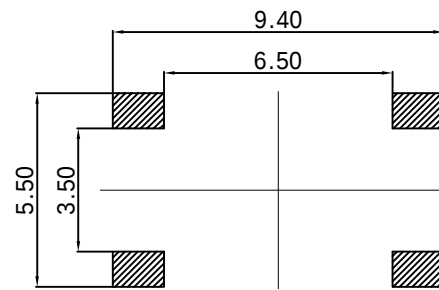
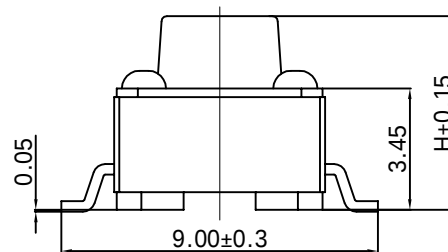



RoHS COMPLIANT

Table 1:

D	H	XX
3.5	4.3	01
	4.5	02
	5.0	03
3.3	5.5	04
	6.0	05
	6.5	06
	7.0	07
3.2	7.3	08
	7.5	09
3.0	8.0	10
	8.5	11
	9.0	12
	9.5	13
	10.0	14
	10.5	15
	11.0	16
	11.5	17

D	H	XX
3.0	12.0	18
	12.5	19
	13.0	20
	13.5	21
	14.0	22
	14.5	23
	15.0	24
	15.5	25
	16.0	26
	16.5	27
	17.0	28
	17.5	29
	18.0	30
	18.5	31
	19.0	32

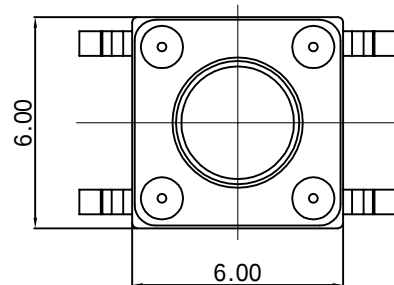

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE±0.05

Part number Information:
DW-TS-S06090- XX TR-XX


TYPE	03	04
Operating Force	160±50gf	250±50gf

TR: Tape Reel



Height and Diamter Choice,
Refer the Table 1

SPECIFICATION

1. Rating:DC 12V 50mA Max
- 2.Contact Resistance:100mΩ Max
- 3.Insulation Resistance:100MΩ Min
- 4.Withstranding voltage:250V AC/min's
- 5.Temperature:-20+70°C
- 6.Operaing Life:100,000 Cycle
- 7.Travel:0.25±0.1mm



Circuit Diagram

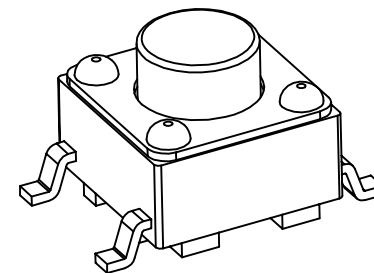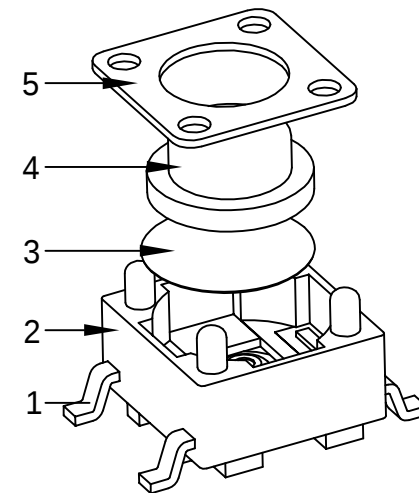

NO.	PART NAME	MATERIAL	Q'TY	FINISHING
5	Cover	Iron	1	Copper-tin plating
4	Button	PPA	1	Black
3	Shrapnel	SUS	1	Ag plating
2	Housing	PPA	1	Black
1	Terminal	Brass	4	Ag plating

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
						Angle ±2°	DESIGN	Aple	2015.09.01		龍威電子有限公司 Dragon Well Elec Dragon Well Electronics Co.,Ltd TITLE: Tact switch MODEL NO. DW-TS-S06090-XXTR-XX
						L>30 ±0.50	CHECK	Jason	2015.09.01		
						10<L≤20 ±0.35	APPROVAL	Rix	2015.09.01		
						5<L≤10 ±0.30					
						L<5 ±0.20					