


RoHS COMPLIANT

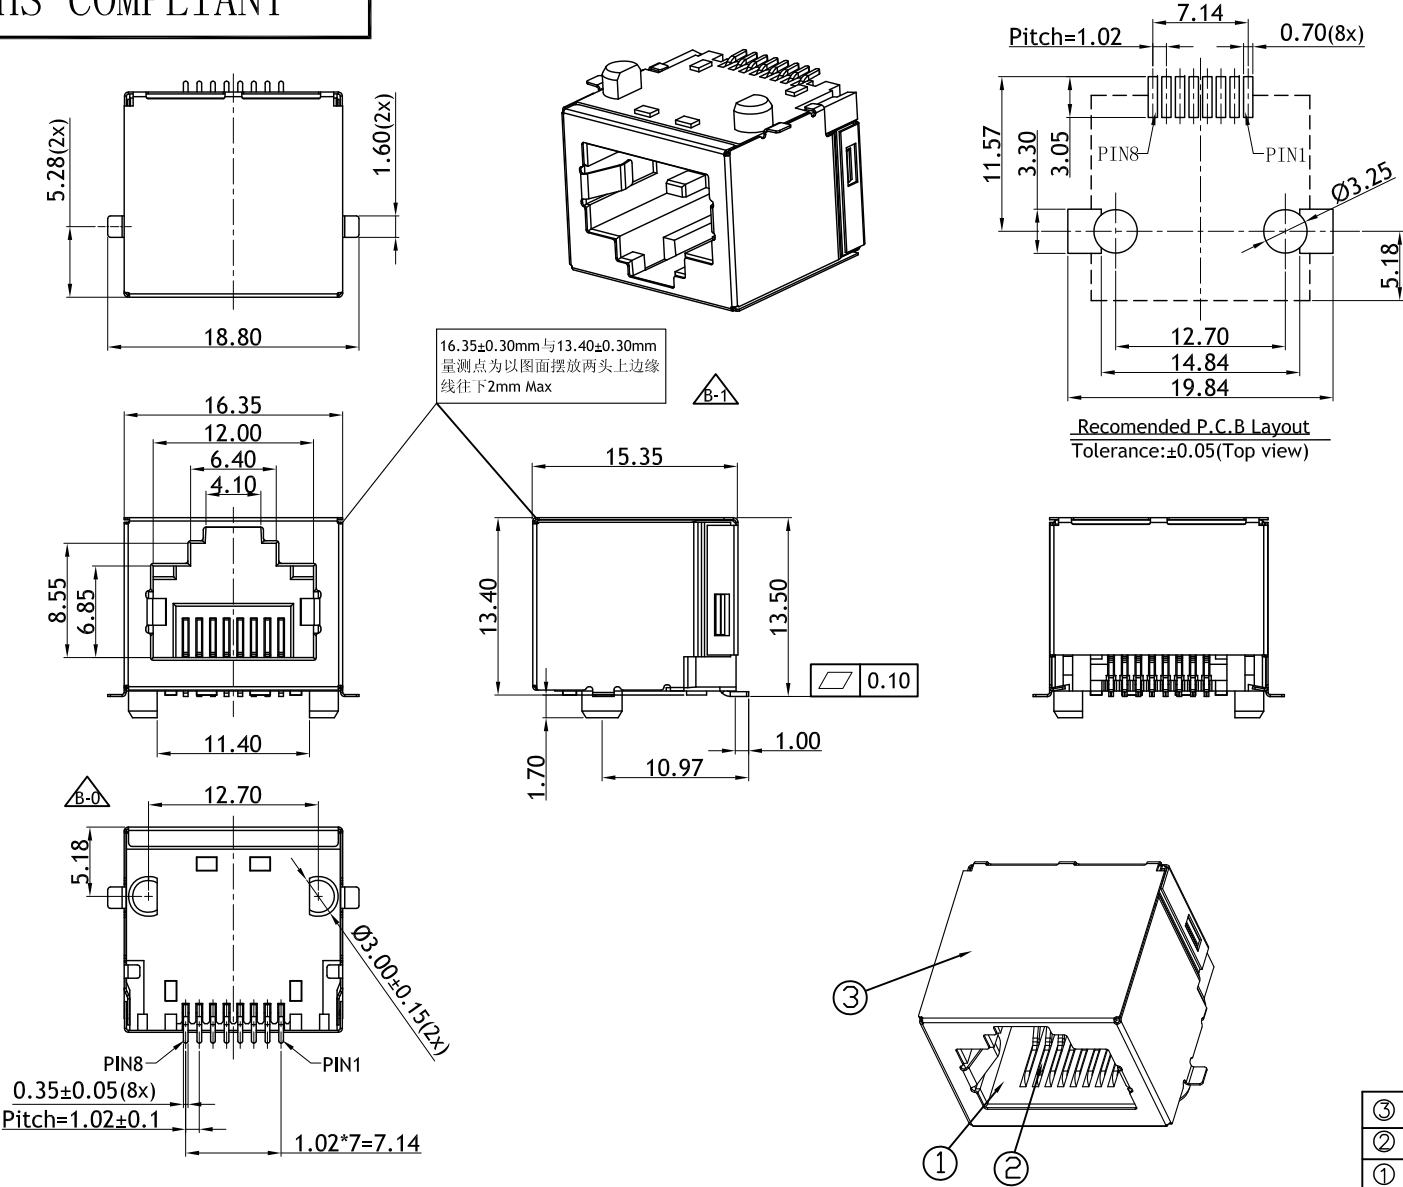

- MODEL NO. :
RJ45- 02 A BK7 AU0X L-RH
(1) (2)(3)(4) (5) (6)(7)
- (1) Titel
 - (2) Series no.
 - (3) Schematic type: A
 - (4) Housing material and color:
BK7= LCP UL94V-0(Black)
 - (5) Terminal plating:
AU06=Gold flash on all area,
3u"Min Gold on contact area.
AU08=Gold flash on all area,
6u"Min Gold on contact area.
 - (6) Packing mode:
L=Reel packing
 - (7) Environmental requirements:
RH=RoHS 2.0 and Halgen Free Compliant

- SPECIFICATION
- 1.Mating:AC 150V 1.5A.
 - 2.Contact resistance:≤50mΩ.
 - 3.Insulation resistance:500MΩ(DC 500V).
 - 4.Withstanding voltage:500V AC.
 - 5.Mating force:25N Max.
 - 6.Life test:5000 cycles Min.

③	Shell	1	Stainless steel,0.15t	Nickel plating
②	Terminal	8	Phosphor bronze,0.3t	Gold flash on all area,3u"/6u" Min Gold on contact area.
①	Housing	1	LCP	Black
NO.	DESCRIPTION	QTY	MATERIAL	REMARK

						Angle	±2°	DESIGN	Aple	2018.10.30	Dragon Well Electronics Co.,Ltd		
	B-1	2018.10.30	增加16.35±0.30和13.40±0.30mm量测点说明	Aple	Rix	10<L≤20	±0.30	CHECK	Jason	2018.10.30	Dragon Well Electronics Co.,Ltd		
	B-0	2015.08.18	Update the drawing	Aple	Rix	5<L≤10	±0.25	APPROVAL	Rix	2018.10.30	TITLE: RJ45 CONNECTOR		
	A-0	2015.05.08	NEW	Aple	Rix	L≤5	±0.20				MODEL NO. RJ45-02ABK7AU06L-RH		
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: 3:1	UNIT:mm	A4	SHEET: 1 of 1	FILE NO.	Q/DW.QW-RJ45-02ABK7AU06L