

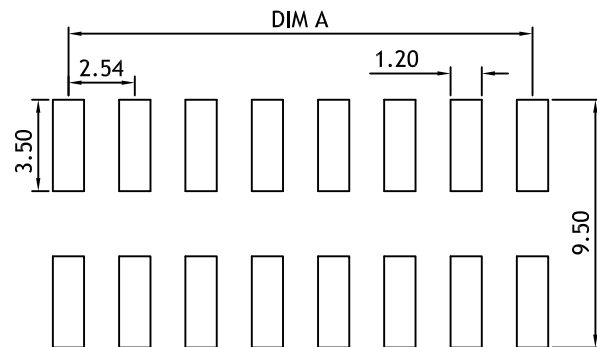
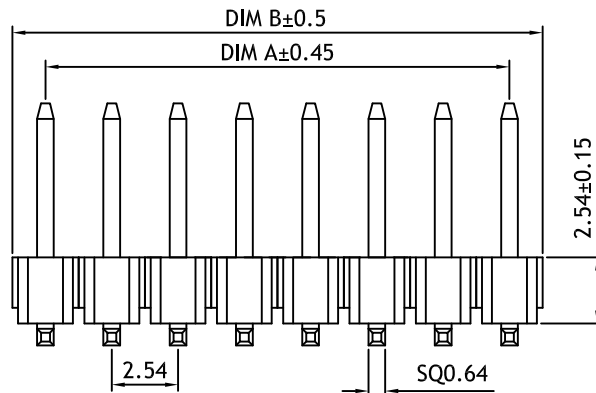
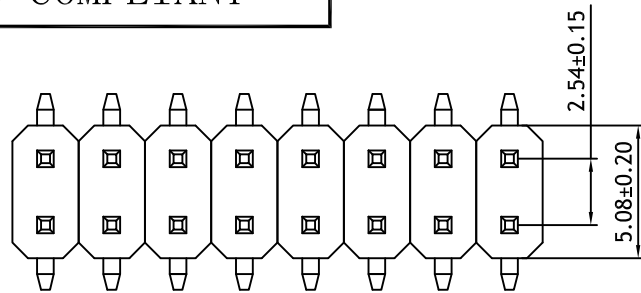


RoHS COMPLIANT

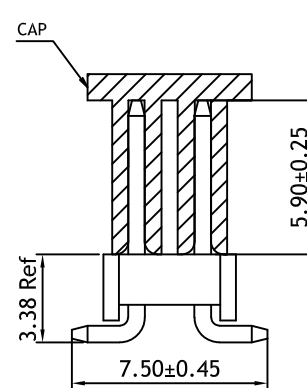

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE±0.05

Plastic cap(Black)

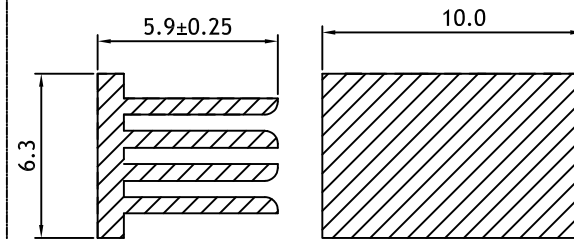

技术参数/Technical parameters

- 1 额定电流/Current Rating :3AMP
- 2 绝缘阻抗/Insulator Resistance :1000MΩ Min.
- 3 接触阻抗/Contact Resistance :20mΩ Max.
- 4 耐电压值/Voltage Resistance :AC 500V
- 5 工作温度/Operating Temperature :-40℃ To +105℃
- 6 金属材料/Metallic Material :Brass
- 7 金属处理/Metal Treatment :
Ni(30-50u")+Au(0.5-0.8u")
- 8 绝缘材料/Insulator Material:PA6T UL94V-0

PIN No.	DIM A	DIM B
04	2.54	5.08
06	5.08	7.62
08	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
26	30.48	33.02
28	33.02	35.56
30	35.56	38.10
32	38.10	40.64
34	40.64	43.18
36	43.18	45.72
38	45.72	48.26
40	48.26	50.80





PIN No.	DIM A	DIM B
42	50.80	53.34
44	53.34	55.88
46	55.88	58.42
48	58.42	60.96
50	60.96	63.50
52	63.50	66.04
54	66.04	68.58
56	68.58	71.12
58	71.12	73.66
60	73.66	76.20
62	76.20	78.74
64	78.74	81.28
66	81.28	83.82
68	83.82	86.36
70	86.36	88.90
72	88.90	91.44
74	91.44	93.98
76	93.98	96.52
78	96.52	99.06
80	99.06	101.60

Part number Information:

DW-PH-2 254121WVnP-XX TR- 01
Dual Row
Pitch 2.54mm
Total PINS
Connector Plating
01:Gold Flash
03:3u" Gold
06:6u" Gold
15:15u" Gold
30:30u" Gold
31:Sn
32:Ni
TR:Tape Reel
Series 01-99


						Angle	±2°	DESIGN	Aple	2018.07.11		 龍威電子有限公司 Dragon Well Electronics Co., Ltd TITLE: 2.54 PIN HEADER DUAL ROWS SMT TYPE BASE 2.54H MODEL NO. DW-PH-2254121WVnP-XXTR-01 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
						X.	±0.45	CHECK	Jason	2018.07.11		
						X.X	±0.38					
	A-1	2018.07.11	Update spec	Aple	Rix	X.XX	±0.25	APPROVAL	Rix	2018.07.11		
	A-0	2015.06.02	NEW	Aple	Rix	X.XXX	±0.15					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4		SHEET: 1 of 1

RoHS COMPLIANT

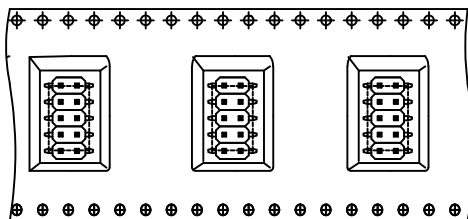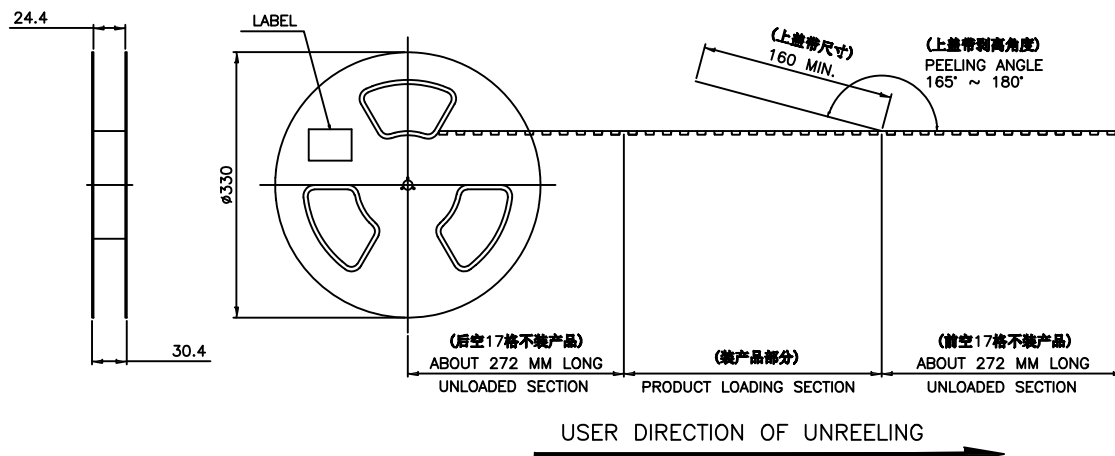

3500	350
PCS/OUTER BOX pcs/10卷/外箱	PCS/TAPE PCS/卷

- NOTE(备注):
1. MATERIAL(材料):
BOX: FIBREBOARD, CORRUGATED, DOUBLE WALL.
(紙箱: 双坑瓦楞紙箱)
TAPE: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 120°C, BLACK COLOR.
(胶带: 聚苯乙烯黑色塑料, 耐高温120度。)
REEL: POLYSTYRENES, HEAT-RESISTANT TEMPERATURE: 70°C, BLUE COLOR.
(卷盘: 聚苯乙烯蓝色塑料, 耐高温70度。)
BAG: POLYETHYLENE, HEAT-RESISTANT TEMPERATURE: 100°C.
(PE袋: 聚乙烯塑料, 耐高温100度。)
 2. PEELING STRENGTH: 0.1 ~ 1.3 N (10 ~ 130 GRAMS)
(上盖带剥离力度: 0.1~1.3牛頓 (10~130g/f))
 3. PEELING SPEED: 300 mm/min.
(上盖带剥离速度: 300毫米/分钟)

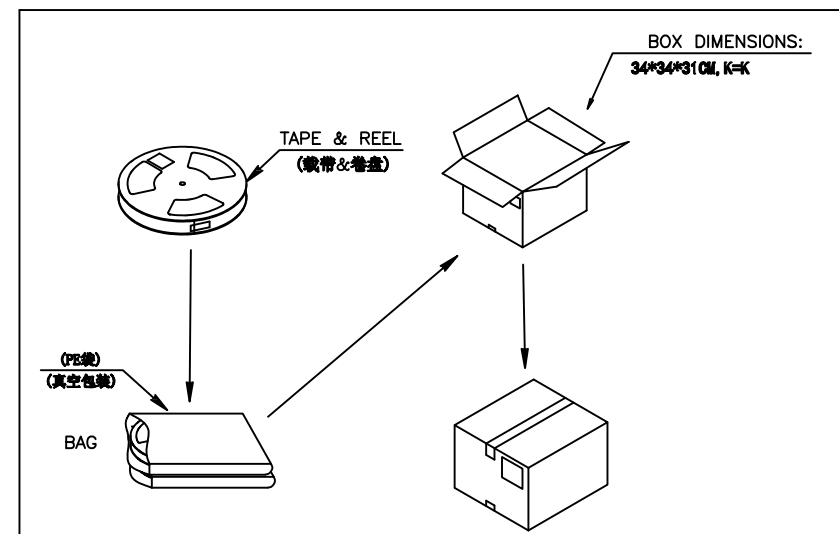

						Angle	±2°	DESIGN	Aple	2018.07.11		 龍威電子有限公司 Dragon Well EleDragon Well Electronics Co.,Ltd		
						X.	±0.45	CHECK	Jason	2018.07.11			TITLE:	2.54 PIN HEADER DUAL ROWS SMT TYPE BASE 2.54H
						X.X	±0.38							
						X.XX	±0.25	APPROVAL	Rix	2018.07.11			MODEL NO.	DW-PH-2254121WV10P-XXTR-01PACKING
						X.XXX	±0.15							
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4 	SHEET: 2 of 2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		