
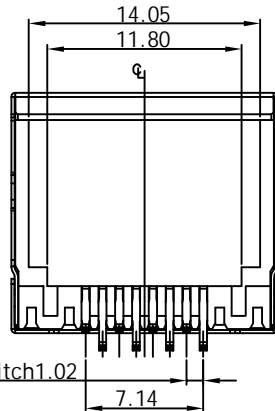
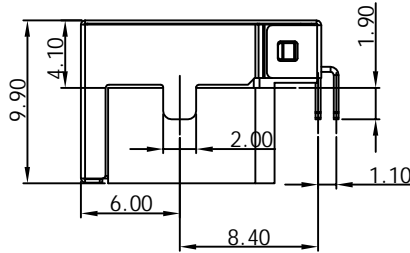

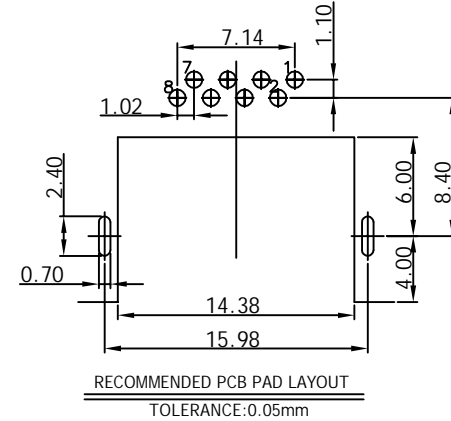
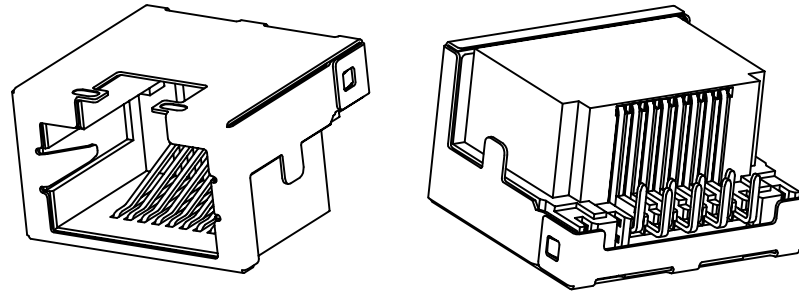


RoHS COMPLIANT




Part number Information:

DW-RJ45-D001883-01 XX -01

Terminal Plating  
 01: Gold Flash Plating on Mating Area  
 03: 3u" Gold Plating on Mating Area  
 06: 6u" Gold Plating on Mating Area  
 15: 15u" Gold Plating on Mating Area  
 30: 30u" Gold Plating on Mating Area  
 TP: Tray Packing  
 TR: Tape Reel  
 Series  
 01-99

NOTES:

- HOUSING MATERIAL: LCP GLASS FILLED POLYESTER UL94V-0.
  - CONTACT MATERIAL: PHOSPHOR BRONZE, C5191, T0.30MM
  - PLATING: GOLD PLATED ON CONTACT AREA, 80u" MIN. TIN PLATED ON SOLDERING AREA, 50u" MIN. NICKEL PLATED OVERALL.
  - SHELL: BRASS, C2680, T=0.20. WITH 40u" NICKEL PLATED.
- ELECTRICAL:
- VOLTAGE RATING: 125V AC RMS.
  - CURRENT RATING: 1.5AMP.
  - CONTACT RESISTANCE: 30MILLIOHMS MAX.
- MECHANICAL:
- DURABILITY: 750 CYCLES MIN.
  - INSERTION FORCE: 22N MAX.
  - REMOVAL FORCE (WITHOUT PLUG LOCK): 22N MAX.
- ENVIRONMENTAL:
- STORAGE: -40°C~85°C
  - OPERATION: -40°C~85°C
  - IR REFLOW SOLDERING Temperature, 255±5°C.
- \*Apply to the EU standards (ROSH)

						Angle	±2°	DESIGN	Aple	2023.11.07	 东莞市百盾康电子有限公司 Dongguan Bestconn Electronics Co., Ltd		
						X.	±0.40	CHECK	Jason	2023.11.07			
						X.X	±0.35	APPROVAL	Rix	2023.11.07			
	A-0	2023.11.07	NEW	Michael	Rix	X.XX	±0.30				TITLE:	RJ45 1port FEMALE 沉板H4.10 DIP	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	MODEL NO.	DW-RJ45-D001883-01XX-01
											THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO BESTCONN AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		