


RoHS COMPLIANT

Current rating:5A AC,DC  
 Voltage rating:250V AC,DC  
 Temperature range:-25°C~+85°C  
 Contact resistance:10mΩ Max.  
 Insulation resistance:1000MΩ Min.  
 Withstanding voltage:1500V AC/minute  
 Material:Nylon 66,UL94V-2

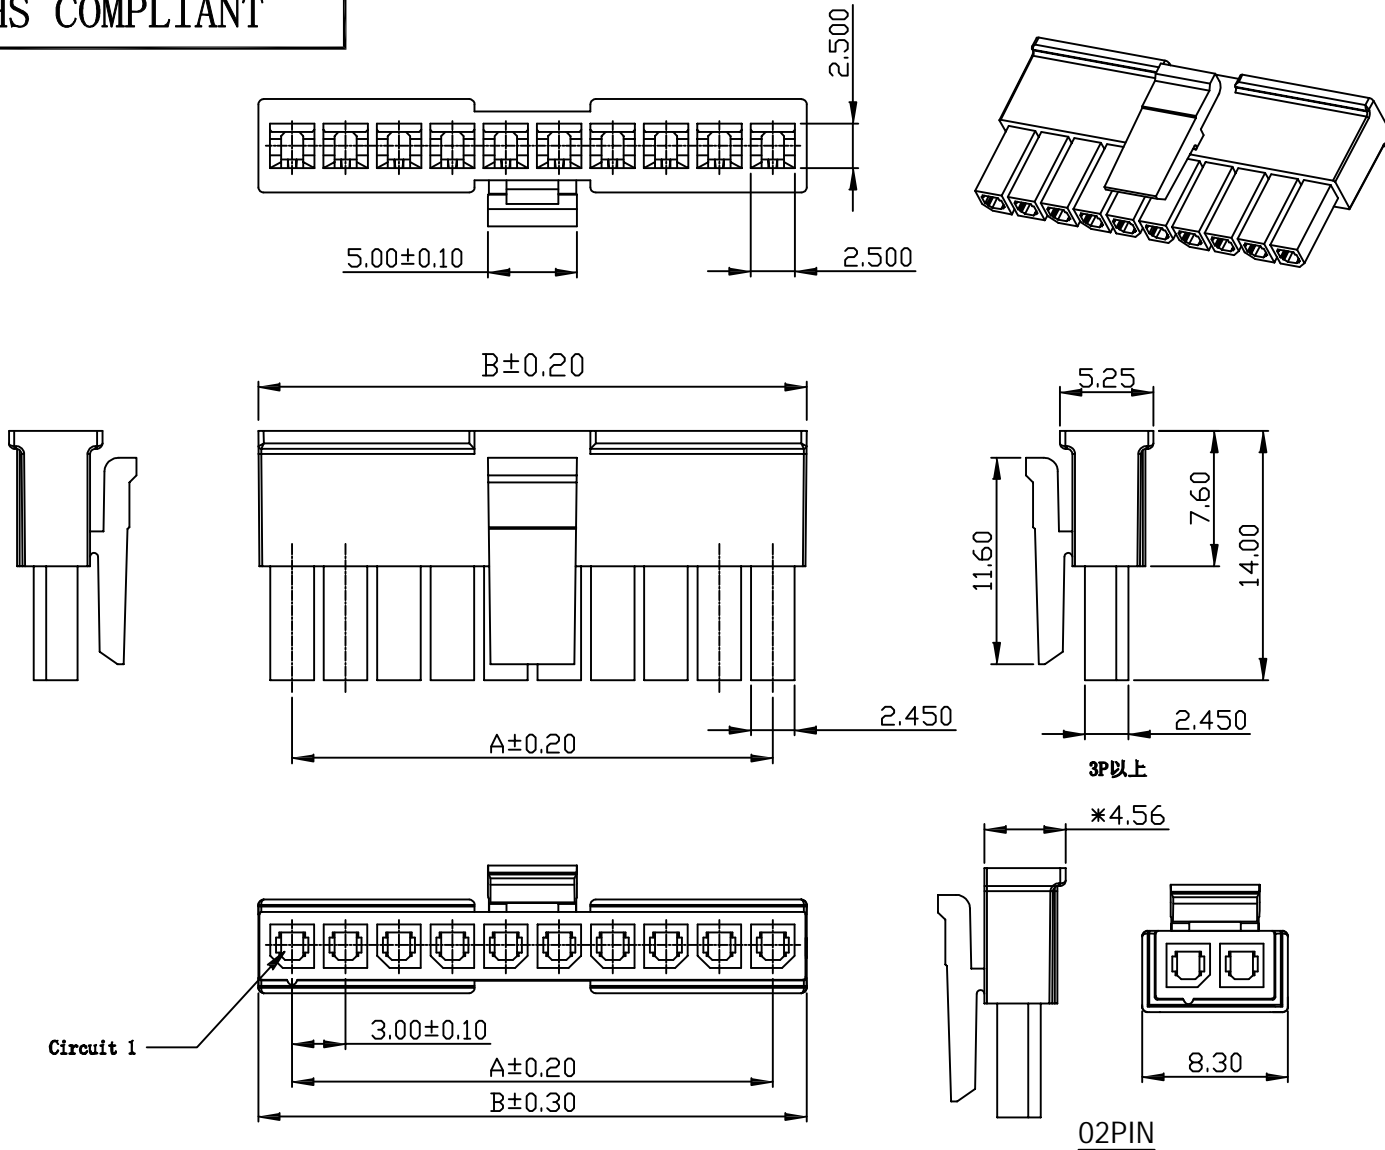

PIN NO.	Dimensions	
	A	B
02	3.00	8.30
03	6.00	9.80
04	9.00	12.80
05	12.00	15.80
06	15.00	18.80
07	18.00	21.80
08	21.00	24.80
09	24.00	27.80
10	27.00	30.80
11	30.00	33.80
12	33.00	36.80

**DW-HG-1 300 168WVnP- PE -01**

Dragon Well  
 Housing  
 Single Row  
 Pitch 3.00mm  
 Series No.  
 (01-99)  
**Total PINS**  
**PE:PE Bag**  
**Series(ECN No.)**  
 01-99

						Angle	±2°	DESIGN	Aple	2015.10.26	
						X.X	±0.35	CHECK	Jason	2015.10.26	
						X.XX	±0.30	APPROVAL	Rix	2015.10.26	
	A-0	2015.10.26	NEW	Michael	Rix	X.XXX	±0.20				
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 2


龍威電子有限公司  
 Dragon Well Ele Dragon Well Electronics Co.,Ltd

TITLE: **3.00 Crimp Style Connectors**

MODEL NO. **DW-HG-1300168WVnP-PE-01**

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

RoHS COMPLIANT

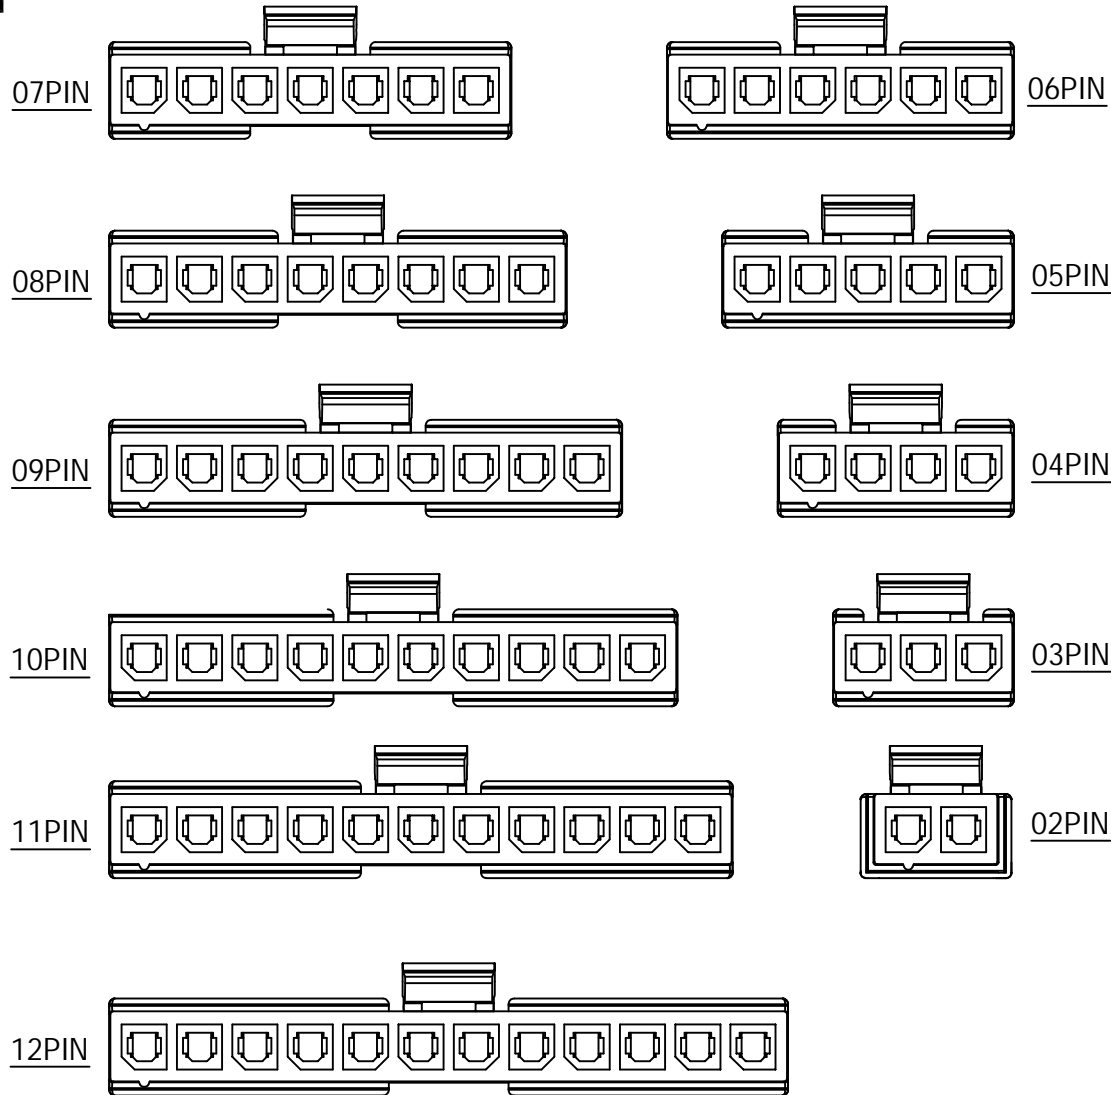

						Angle	±2°	DESIGN	Aple	2015.10.26		龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd		
						X.X	±0.35	CHECK	Jason	2015.10.26			TITLE:	3.00 Crimp Style Connectors
						X.XX	±0.30	APPROVAL	Rix	2015.10.26			MODEL NO.	DW-HG-1300168WvNP-PE-01
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	⊕	SHEET: 2 of 2	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	