
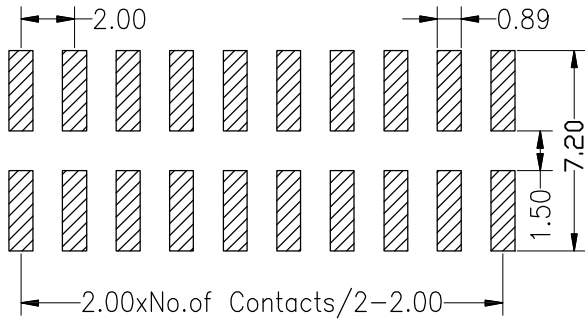
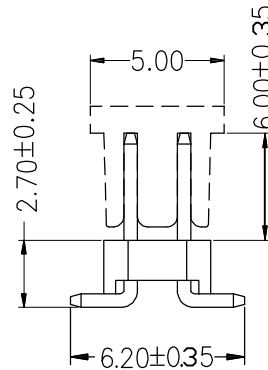
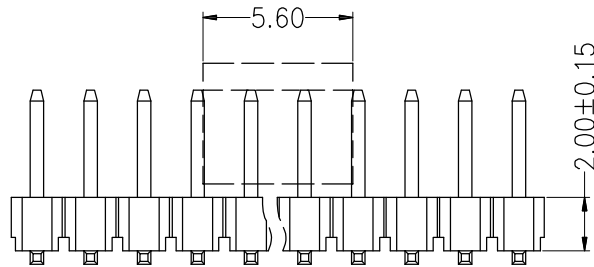


RoHS COMPLIANT

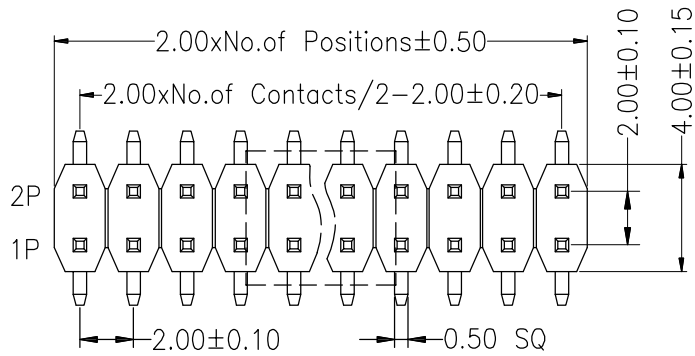


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

SPECIFICATIONS

Rated Current:2.0AMP
Contact Resistance:20mΩ Max
Withstand Voltage:500V AC
Insulation Resistance:1000MΩ Min
Operation Temperature:-40°C to +105°C

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:Polyester(UL94V-0)
Standard: PA6T
Soldering temperature:260°C± 5° 5S

Part number Information:

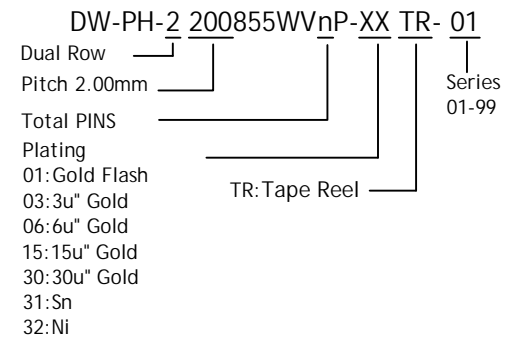

						Angle	±2°	DESIGN	Aple	2025.11.06	<p>龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd</p>	
						X	±0.30	CHECK	Jason	2025.11.06		
						X.X	±0.25	APPROVAL	Rix	2025.11.06		
						X.XX	±0.15					
						X.XXX	±0.10					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION