
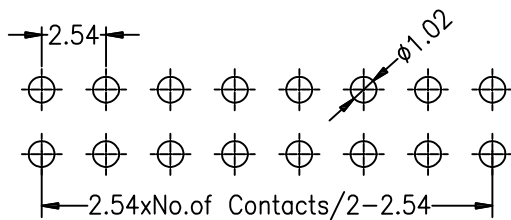
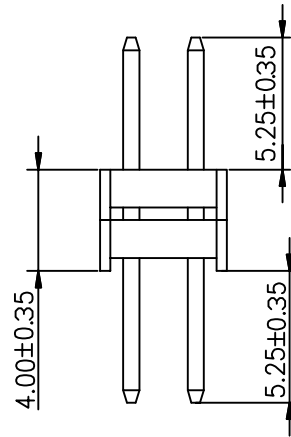
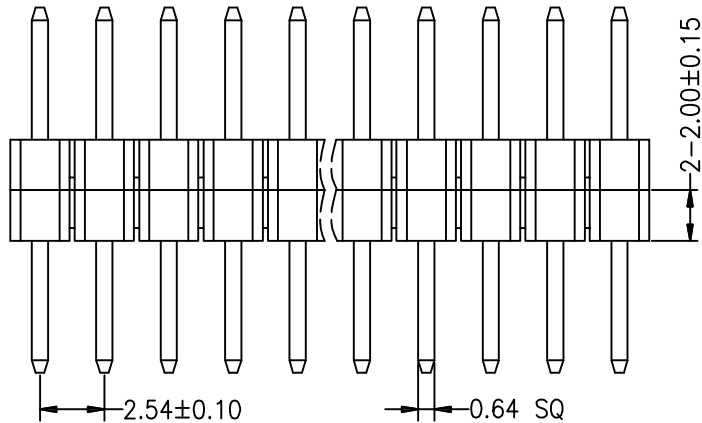


RoHS COMPLIANT

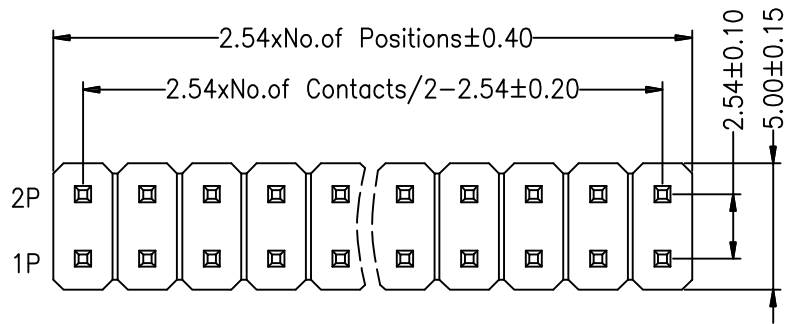

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE ±0.05)

SPECIFICATIONS

Rated Current: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C
 Contact Material: Brass
 Contact Plating: Au or Sn Over Ni
 Insulator Material: PA6T (UL94V-0)
 Resistance To Soldering Heat:
 260°C ±5°C, 10s

Part number Information:

DW-PH-2 254859WVnP-XX PE-01

Dual Row
 Pitch 2.54mm
 Total PINS
 Plating
 01: Gold Flash
 03: 3u" Gold
 06: 6u" Gold
 15: 15u" Gold
 30: 30u" Gold
 31: Sn
 32: Ni

Series 01-99
 PE: PE Bag

						Angle	±2°	DESIGN	Aple	2023.12.10		龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co., Ltd		
						X	±0.35	CHECK	Jason	2023.12.10			TITLE:	排針 2.54 雙排2*H2.0mmDIP排針
						X.X	±0.30	APPROVAL	Rix	2023.12.10			MODEL NO.	DW-PH-2254859WVnP-XXPE-01
						X.XX	±0.25							
						X.XXX	±0.10							
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		