
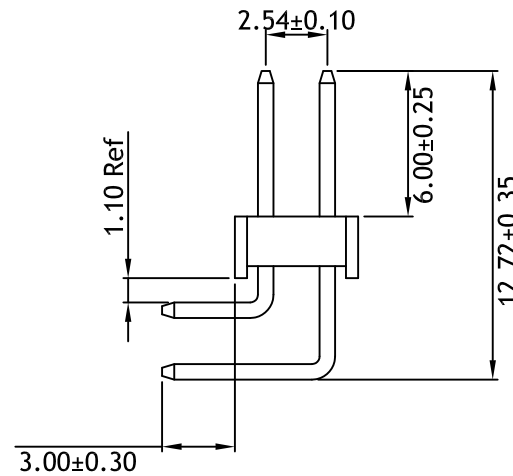
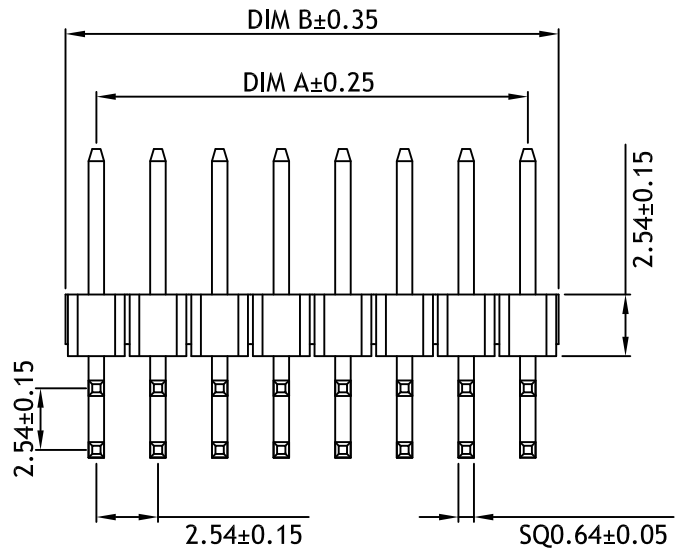


RoHS COMPLIANT


技术参数/Technical parameters

- 1 符合规范 / Accord With Norm :EIA-364C
- 2 额定电流 / Current Rating :3AMP
- 3 绝缘阻抗 / Insulator Resistance :1000MΩ Min.
- 4 接触阻抗 / Contact Resistance :20mΩ Max.
- 5 耐电压值 / Voltage Resistance :AC 500V
- 6 工作温度 / Operating Temperature :-40°C To +105°C
- 7 金属材料 / Metallic Material :Brass
- 8 金属处理 / Metal Treatment :Ni(30-50u") + Au(0.5-0.8u")
- 9 绝缘材料 / Insulator Material :PA6T+30%GF UL94V-0
- 10 耐焊接热 / Resistance To Soldering Heat :260°C ±5°C 10S MAX

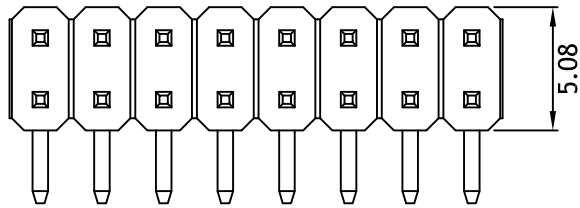


PIN No.	DIM A	DIM B
04	2.54	5.08
06	5.08	7.62
08	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
26	30.48	33.02
28	33.02	35.56
30	35.56	38.10
32	38.10	40.64
34	40.64	43.18
26	43.18	45.72
38	45.72	48.26
40	48.26	50.80

PIN No.	DIM A	DIM B
42	50.80	53.34
44	53.34	55.88
46	55.88	58.42
48	58.42	60.96
50	60.96	63.50
52	63.50	66.04
54	66.04	68.58
56	68.58	71.12
20	71.12	73.66
60	73.66	76.20
62	76.20	78.74
64	78.74	81.28
66	81.28	83.82
68	83.82	86.36
70	86.36	88.90
72	88.90	91.44
74	91.44	93.98
76	93.98	96.52
78	96.52	99.06
80	99.06	101.60

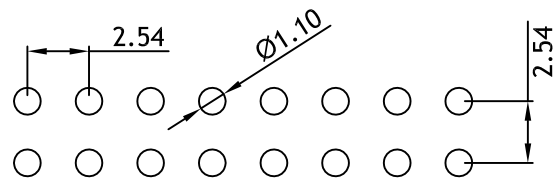

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE±0.05

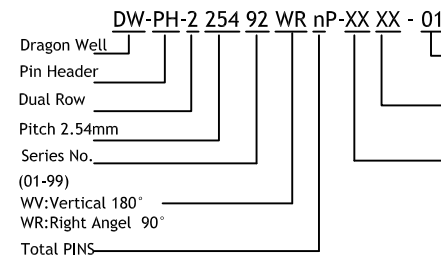

- Series: 01~99
- TP:Tray Packing
- TB:Tube package
- PE:PE Bag
- Plating
- 01:Gold Flash
- 03:3u" Gold
- 06:6u" Gold
- 15:15u" Gold
- 30:30u" Gold
- 31:Sn
- 32:Ni

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1
						Angle ±2°	DESIGN	Aple	2015.03.22	
						X. ±0.45	CHECK	Jason	2015.03.22	
						X.X ±0.35	APPROVAL	Rix	2015.03.22	
	A-0	2015.03.22	NEW	Aple	Rix	X.XX ±0.25				
						X.XX ±0.10				


龍威電子有限公司
 Dragon Well Ele **Dragon Well Electronics Co.,Ltd**

TITLE: 2.54 PIN HEADER DUAL ROWS DIP TYPE BASE 2.54H

MODEL NO. DW-PH-225492WRnP-XXXX-01

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION