
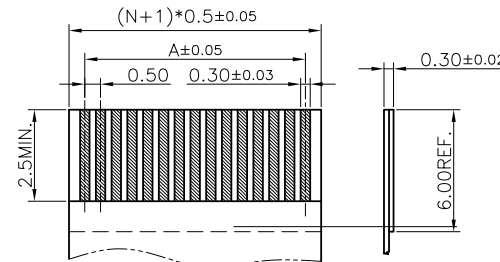

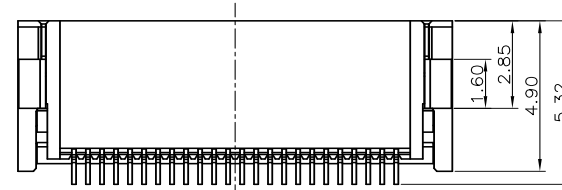
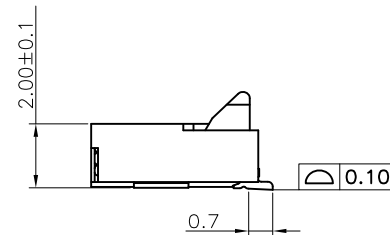


RoHS COMPLIANT

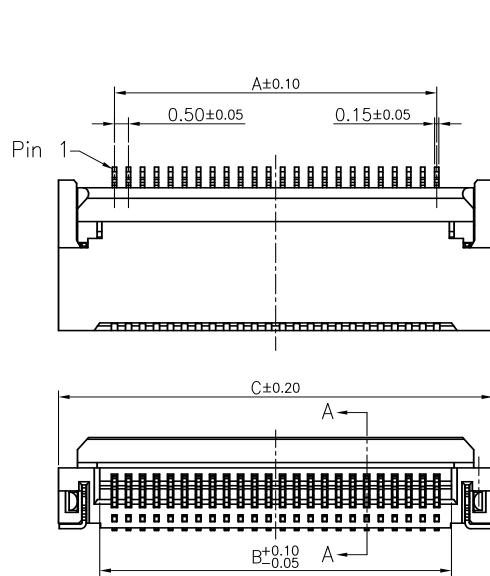

APPLICABLE FFC

Part number Information:

DW-FPC-S050112nP-XX XX - 02

Pitch 0.50mm

Total PINS

Connector Plating

01:Gold Flash Plating on Mating Area

03:3u" Gold Plating on Mating Area

05:5u" Gold Plating on Mating Area

15:15u" Gold Plating on Mating Area


30:30u" Gold Plating on Mating Area

TR:Tape Reel

TB:Tube package

Series

01-99

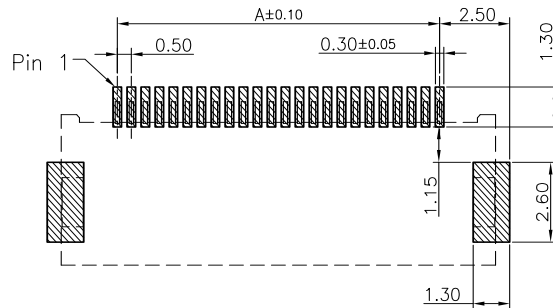

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE±0.05

NOTES:

1.MATERIAL:

HOUSING:HIGHT-TEMP PLASTIC,UL 94V-0, COLOR :NATURE;

COVER:HIGHT-TEMP PLASTIC,UL 94V-0, COLOR:BLACK;

CONTACT:COPPER ALLOY;

LEG:COPPER ALLOY;

2.PLATING:

CONTACT AND SOLDER AREA GOLD FLASH PLATED ON NICKEL OVER ALL.

LEG:TIN PLATED ON NICKEL OVER ALL.

3.RATING:

CURRENT RATING:0.5A AC/DC

VOLTAGE RATING:50V AC/DC

TEMPERATURE RANGE:-40C~+85°C;

CKTS	DIM A	DIM B	DIM C	CKTS	DIM A	DIM B	DIM C
4	1.50	2.55	5.50	33	16.00	17.05	20.00
5	2.00	3.05	6.00	34	16.50	17.55	20.50
6	2.50	3.55	6.50	35	17.00	18.05	21.00
7	3.00	4.05	7.00	36	17.50	18.55	21.50
8	3.50	4.55	7.50	37	18.00	19.05	22.00
9	4.00	5.05	8.00	38	18.50	19.55	22.50
10	4.50	5.55	8.50	39	19.00	20.05	23.00
11	5.00	6.05	9.00	40	19.50	20.55	23.50
12	5.50	6.55	9.50	41	20.00	21.05	24.00
13	6.00	7.05	10.00	42	20.50	21.55	24.50
14	6.50	7.55	10.50	43	21.00	22.05	25.00
15	7.00	8.05	11.00	44	21.50	22.55	25.50
16	7.50	8.55	11.50	45	22.00	23.05	26.00
17	8.00	9.05	12.00	46	22.50	23.55	26.50
18	8.50	9.55	12.50	47	23.00	24.05	27.00
19	9.00	10.05	13.00	48	23.50	24.55	27.50
20	9.50	10.55	13.50	49	24.00	25.05	28.00
21	10.00	11.05	14.00	50	24.50	25.55	28.50
22	10.50	11.55	14.50	51	25.00	26.05	29.00
23	11.00	12.05	15.00	52	25.50	26.55	29.50
24	11.50	12.55	15.50	53	26.00	27.05	30.00
25	12.00	13.05	16.00	54	26.50	27.55	30.50
26	12.50	13.55	16.50	55	27.00	28.05	31.00
27	13.00	14.05	17.00	56	27.50	28.55	31.50
28	13.50	14.55	17.50	57	28.00	29.05	32.00
29	14.00	15.05	18.00	58	28.50	29.55	32.50
30	14.50	15.55	18.50	59	29.00	30.05	33.00
31	15.00	16.05	19.00	60	29.50	30.55	33.50
32	15.50	16.55	19.50				

						Angle	±2°	DESIGN	Aple	2015.09.30		 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd		
						X.X	±0.30	CHECK	Jason	2015.09.30				
						X.XX	±0.25						TITLE:	0.5前插后掀盖H2.0 FPC
	A-0	2015.09.30	NEW	Aple	Rix	X.XXX	±0.20	APPROVAL	Rix	2015.09.30		MODEL NO.	DW-FPC-S050112nP-XXXX-02	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4		SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	