


RoHS COMPLIANT

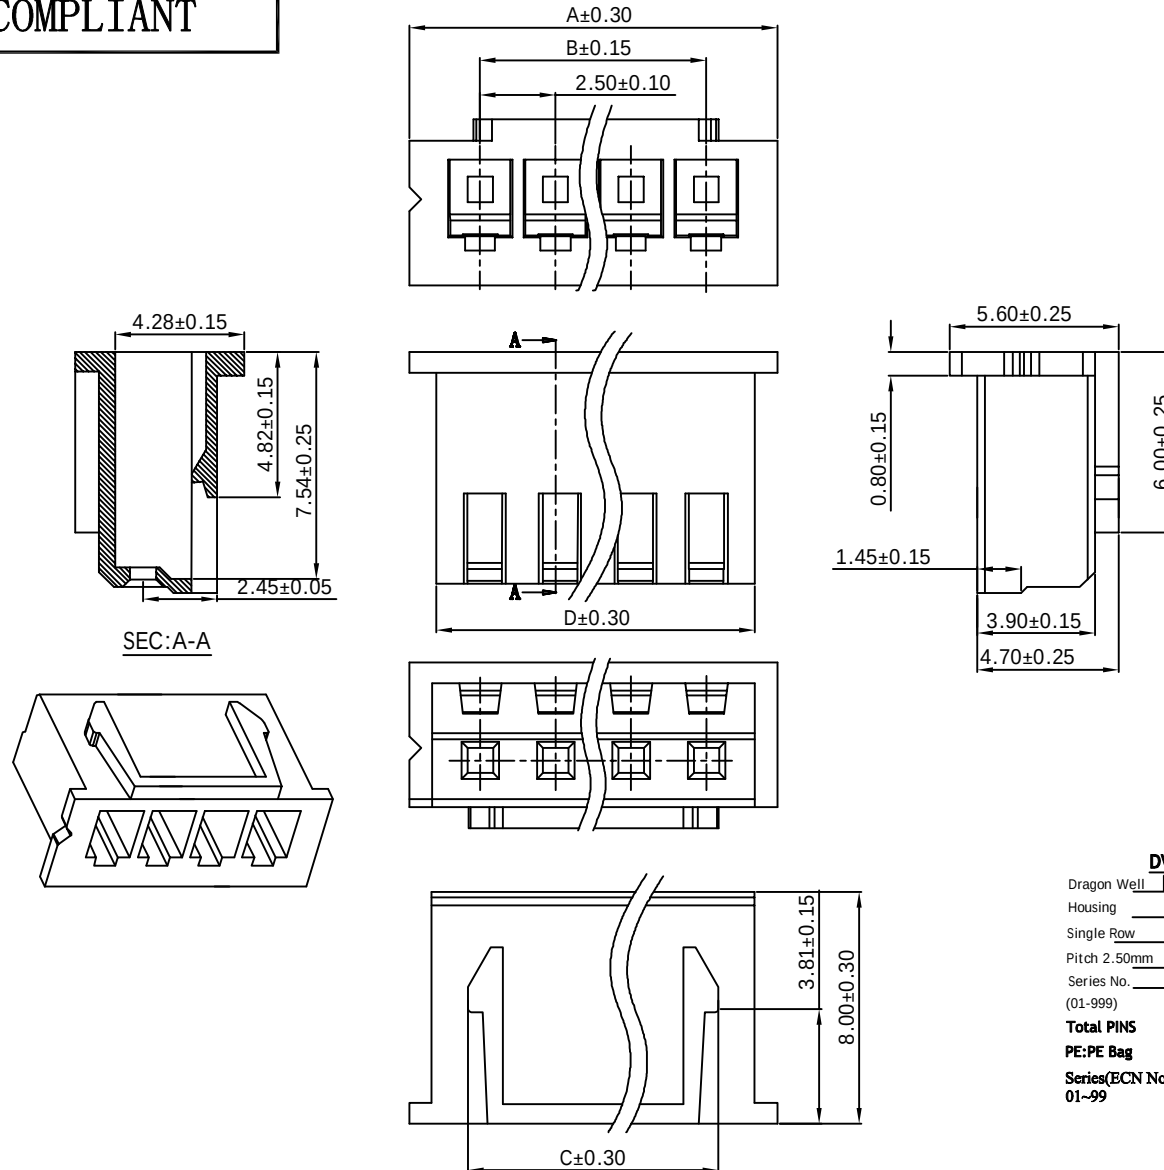

SPECIFICATIONS

- Current rating:3A AC,DC
- Voltage rating:250V AC,DC
- Temperature range:-40℃~105℃
- Insulation resistance:1000MΩ Min.
- Withstanding voltage:200V AC/minute.
- Contact resistance:20mΩ Max.

- Material:
- Material: Nylon66,UL94V-0

PIN	A	B	B	B
02	7.30	2.50	3.50	5.70
03	9.80	5.00	6.00	8.20
04	12.30	7.50	8.50	10.70
05	14.80	10.00	11.00	13.20
06	17.30	12.50	13.50	15.70
07	19.80	15.00	16.00	18.20
08	22.30	17.50	18.50	20.70
09	24.80	20.00	21.00	23.20
10	27.30	22.50	23.50	25.70
11	29.80	25.00	26.00	28.20
12	32.30	27.50	28.50	30.70
13	34.80	30.00	31.00	33.20
14	37.30	32.50	33.50	35.70
15	39.80	35.00	36.00	38.20
16	42.30	37.50	38.50	40.70
17	44.80	40.00	41.00	43.20
18	47.30	42.50	43.50	45.70
19	49.80	45.00	46.00	48.20
20	42.30	47.50	48.50	50.70

DW-HG-1 250 151WVnP- PE -01
Dragon Well
Housing
Single Row
Pitch 2.50mm
Series No.
(01-999)
Total PINS
PE:PE Bag
Series(ECN No.)
01~99

						Angle	±2°	DESIGN	Aple	2018.09.23		 Dragon Well Ele 龍威電子有限公司 Dragon Well Electronics Co.,Ltd
						X.	±0.3	CHECK	Jason	2018.09.23		
						X.X	±0.25	APPROVAL	Rix	2018.09.23		
						X.XX	±0.20					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION