

RoHS COMPLIANT

Specifications

Current Rating: 2.0Amp

Insulation Resistance: 1000M Ω Min.

Dielectric Withstanding: 500VAC




Contact Resistance: 20m Ω Max.

Operating Temperature:-40°C to +105°C


Materials

Contact Material: Copper Alloy

Insulator Material: PA6T, UL 94V-0

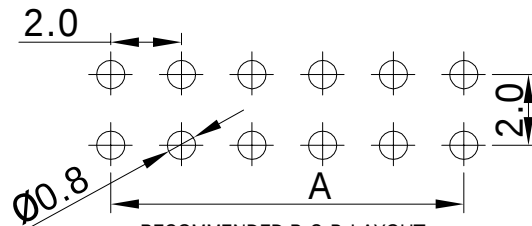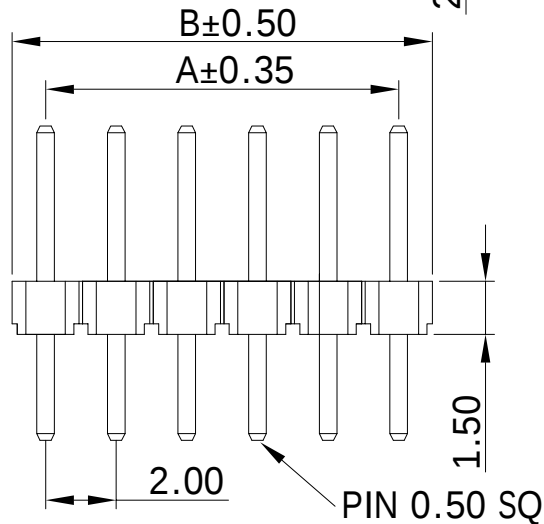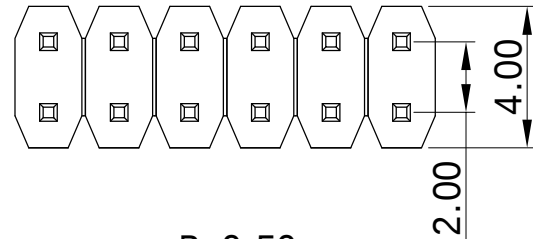

RECOMMENDED P.C.B. LAYOUT
ALL TOLERANCES ARE ± 0.05

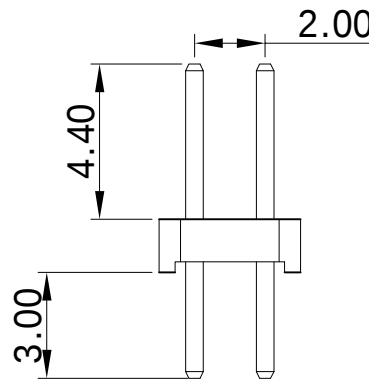

Part number Information:

DW-PH-2 200 886 WV NP-01 PE -01
Dragon Well
Pin Header
Dual Row
Pitch 2.00mm
Series No.
(01-99)
WV: Vertical 180°
WR: Right Angel 90°
PINS
Plating
01: Gold Flash
03: 3u" Gold
06: 6u" Gold
15: 15u" Gold
30: 30u" Gold
31: Sn
32: Ni
PE: PE Bag
Series (ECN No.)
01-99

PIN No.	DIM A	DIM B
04	2.00	4.00
06	4.00	6.00
08	6.00	8.00
10	8.00	10.00
12	10.00	12.00
14	12.00	14.00
16	14.00	16.00
18	16.00	18.00
20	18.00	20.00
22	20.00	22.00
24	22.00	24.00
26	24.00	26.00
28	26.00	28.00
30	28.00	30.00
32	30.00	32.00
34	32.00	34.00
36	34.00	36.00
38	36.00	38.00
40	38.00	40.00

PIN No.	DIM A	DIM B
42	40.00	42.00
44	42.00	44.00
46	44.00	46.00
48	46.00	48.00
50	48.00	50.00
52	50.00	52.00
54	52.00	54.00
56	54.00	56.00
58	56.00	58.00
60	58.00	60.00
62	60.00	62.00
64	62.00	64.00
66	64.00	66.00
68	66.00	68.00
70	68.00	70.00
72	70.00	72.00
74	72.00	74.00
76	74.00	76.00
78	76.00	78.00
80	78.00	80.00

						Angle	$\pm 2^\circ$	DESIGN	Aple	2015.02.29	
						X.X	± 0.38	CHECK	Jason	2015.02.29	
						X.XX	± 0.25	APPROVAL	Rix	2015.02.29	
	A-0	2015.02.29	NEW	Aple	Rix	X.XXX	± 0.13				
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1

龍威電子有限公司	
Dragon Well Elec. Dragon Well Electronics Co., Ltd	
TITLE:	2.00 PIN HEADER DUAL ROWS DIP TYPE BASE 1.50H
MODEL NO.	DW-PH-2200886WVNP-01PE-01
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	