
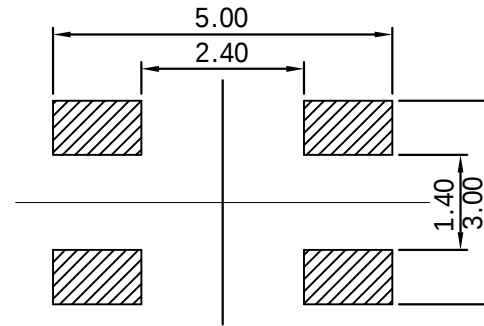
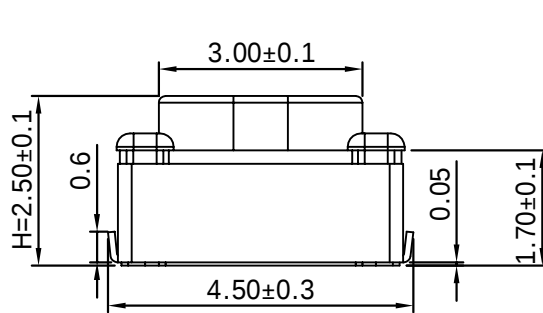
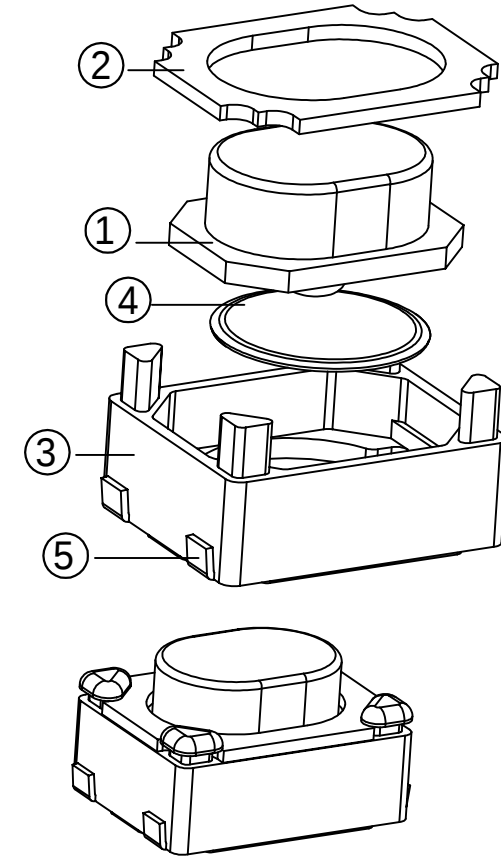




RoHS COMPLIANT

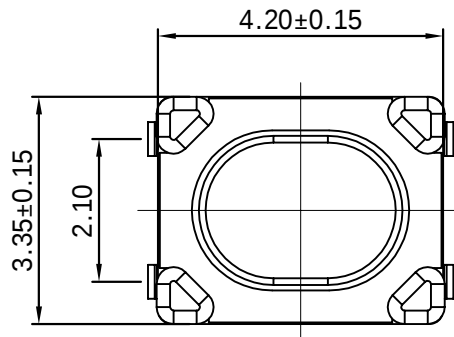

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE±0.05

SPECIFICATION

- 1.Rating: 50mA/DC 12V Max.
- 2.Contact resistance: 50mΩ Max.
- 3.Insulation resistance:100MΩ Min
- 4.Travel:0.20±0.10mm
- 5.Operating Life:160gf 50,000 Cycle
250gf 50,000 Cycle

Part number Information:
DW-TS-S05520-XX TR -01

TYPE	01	02
Operating Force	160±50gf	250±50gf

TR: Tape Reel
Height: (H±0.1)
01: 2.5mm

5	Terminal	Phosphor bronze	1	Ag Plating
4	Contact	SUS	1	Ag CLAD
3	Case	LCP	1	_____
2	Cover	Phosphor bronze	1	Ni Plating
1	Stem	PPA	1	_____
NO.	Part name	Material	Q'ty	Finishing

						Angle	±2°	DESIGN	Aple	2016.08.03		 Dragon Well Ele TITLE: Tact switch(3.2*4.2*2.5 包脚) MODEL NO. DW-TS-S05520-XXTR-01 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
						X.	±0.45	CHECK	Jason	2016.08.03		
						X.X	±0.35	APPROVAL	Rix	2016.08.03		
						X.XX	±0.25					
						X.XXX	±0.10					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	
	A-0	2016.08.03	NEW	Aple	Rix							