
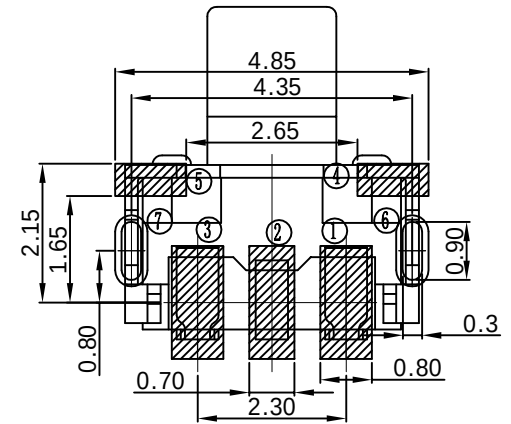
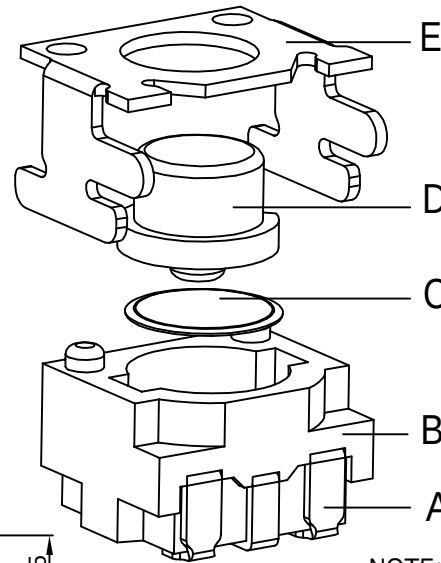
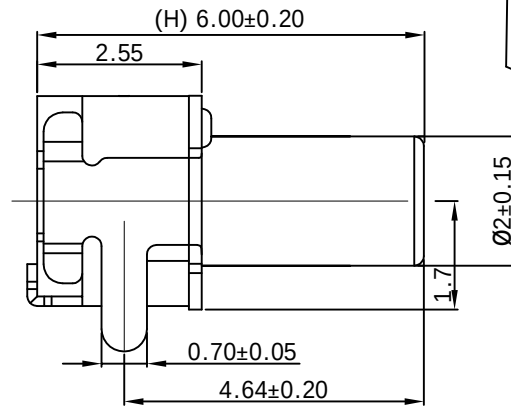
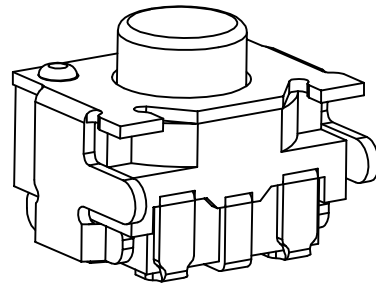
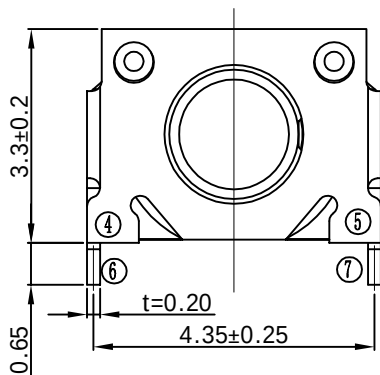


RoHS COMPLIANT

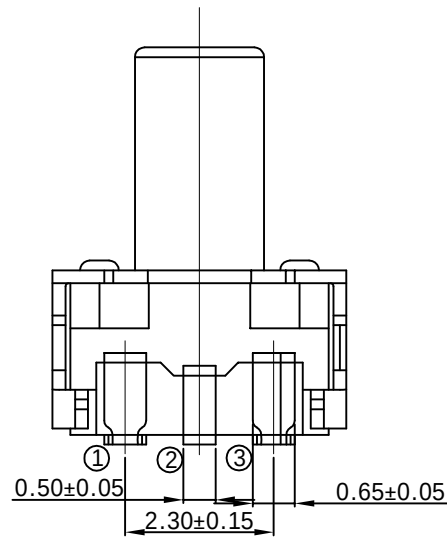

RECOMMENDED P.C.B LAYOUT
TOP VIEW (TOLRANCE:±0.05)

NOTE:

- 1.Rating:DC12V 50mA Max;
- 2.Contact Resistance:100mΩ Max;
- 3.Insulation Resistance:100MΩ Min;
- 4.Withstanding Voltage:AC250V For 1 Minute;
- 5.Life Cycle:50,000 Cycle Min;
- 6.Operating Force:250±50gf/160±50;
- 8.Travel:0.15±0.1mm.

Part number Information:


DW-TS-S060183C-XX TR -01

H:
C:6.00mm

TYPE	01	02
Operating Force	250±50gf	160±50gf

TR:Tape Reel

Series
01-99

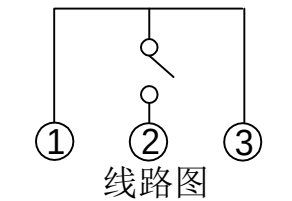


线路图
Circuit Diagram




E	盖板	黄铜0.2	1	镀银
D	按钮	LCP	1	
C	簧片	不锈钢覆银	1	
B	基座	PPA	1	清洗
A	卡件	磷铜0.15	1	镀银
序号	名称	材 料	数量	备 注

						Angle	±2°	DESIGN	Aple	2023.09.11		龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd TITLE: Tact switch MODEL NO. DW-TS-S060183C-XXTR-01 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
						X.	±0.50	CHECK	Jason	2023.09.11		
						X.X	±0.35					
						X.XX	±0.25	APPROVAL	Rix	2023.09.11		
						X.XXX	±0.20					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	


RoHS COMPLIANT

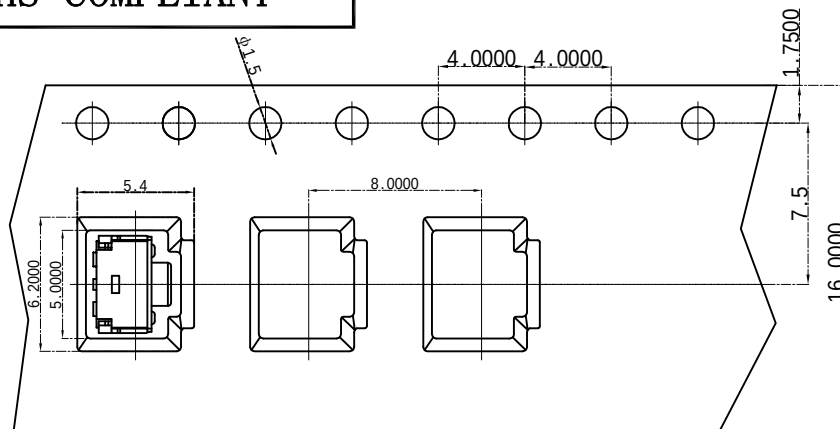


载带尺寸图

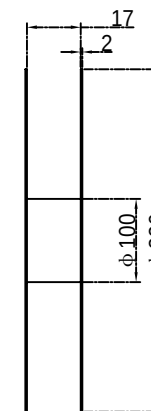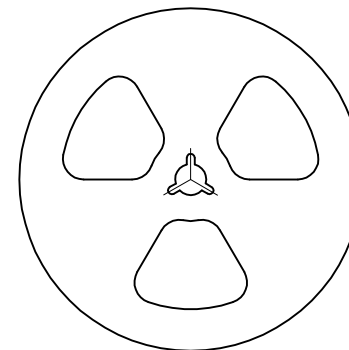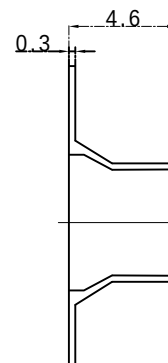


编带盘尺寸图



盖带拉伸方向

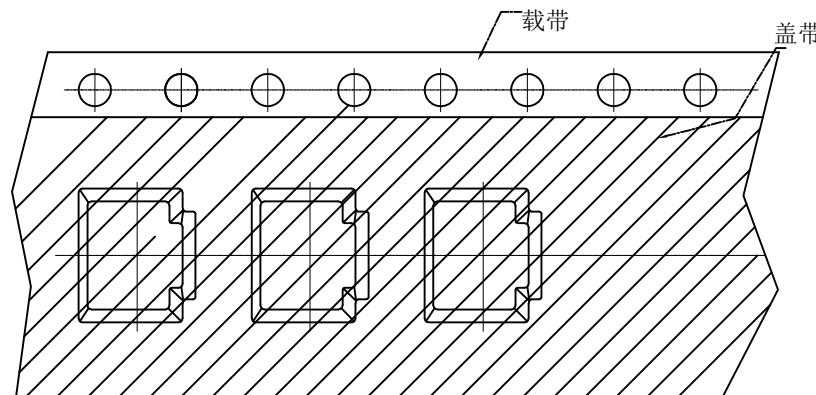


包装图

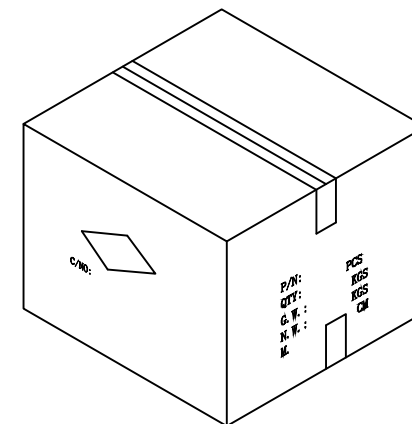

备注:

- 1、在编带前端和末端盖带长出约300-380mm.
- 2、在编带前端和末端各留15-30PCS的载带空位.

- 1.一卷盘装2000PCS产品
- 2.一个外箱装20个卷盘,一个外箱数量40000PCS产品

						Angle	±2°	DESIGN	Aple	2015.09.01		 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd	
						X.	±0.50	CHECK	Jason	2015.09.01			
						X.X	±0.35						
						X.XX	±0.25	APPROVAL	Rix	2015.09.01			
						X.XXX	±0.20					TITLE: Tact switch	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	MODEL NO. DW-TS-S060183A-02TR-01Packing	