

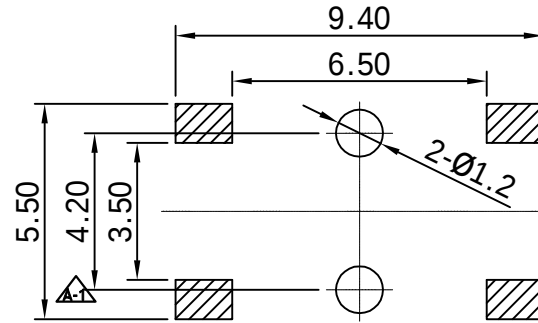

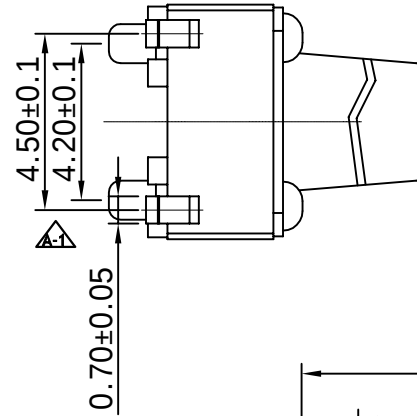
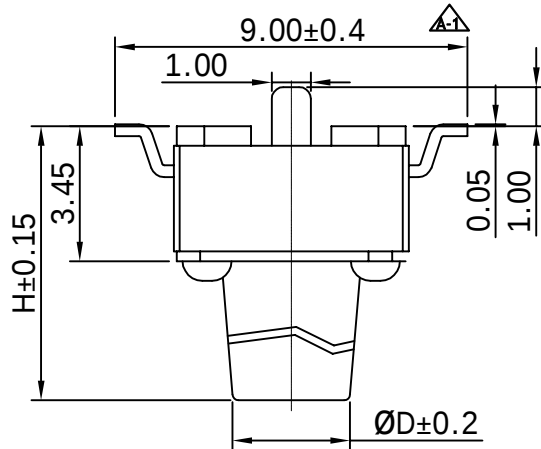
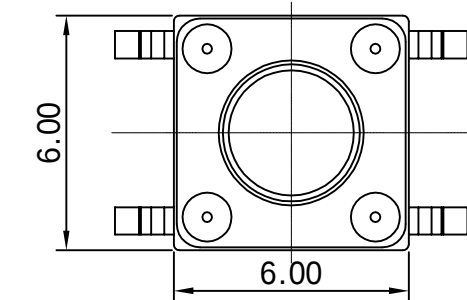


RoHS COMPLIANT

D	H	NO.
3.5	4.3	A
	4.5	B
	5.0	C
3.3	5.5	D
	6.0	E
	6.5	F
	7.0	G
	7.3	J
3.0	7.5	K
	8.0	M
	8.5	P
	12.0	N

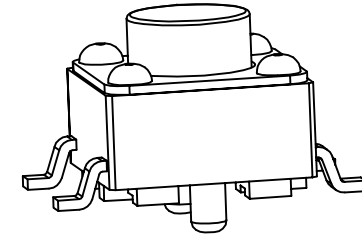

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE±0.05

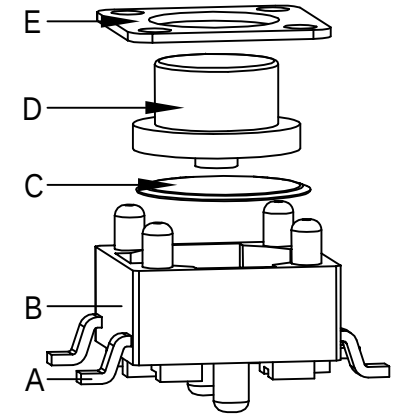

NOTE:

- 1.Rating:DC12V 50mA;
- 2.Contact Resistance:100mΩ Max;
- 3.Insulation Resistance:100MΩ Min;
- 4.Withstanding Voltage:AC250V For1 Minute;
- 5.Life Cycle:100,000 Cycle Min;
- 6.Operating Force:160±30gf/260±50gf;
- 7.Travel:0.25±0.15mm.

Part number Information:

DW-TS-S060321X-XX TR -01

H(SEE Table1)

TYPE	01	02
Operating Force	160±30gf	260±50gf

TR:Tape Reel
Series
01-99

E	盖板	黄铜	1	镀铜锡
D	按钮	PPA 黑	1	
C	簧片	不锈钢覆银	1	
B	基座	PPA 黑	1	清洗
A	卡件	黄铜	2	镀银
序号	名称	材 料	数量	备 注

						Angle	±2°	DESIGN	Aple	2026.02.05		 龍威電子有限公司 Dragon Well Elec. Dragon Well Electronics Co.,Ltd TITLE: Tact switch(6X6帶柱贴片) MODEL NO. DW-TS-S060321X-XXTR-01 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
						X.	±0.45	CHECK	Jason	2026.02.05		
						X.X	±0.35	APPROVAL	Rix	2026.02.05		
						X.XX	±0.25					
						X.XXX	±0.10					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	