

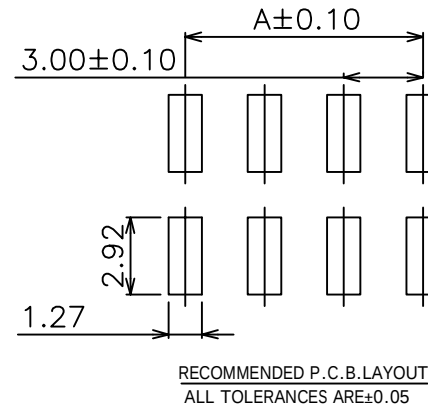
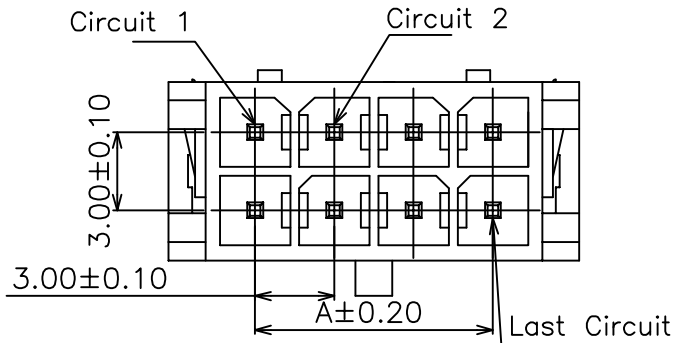



RoHS COMPLIANT

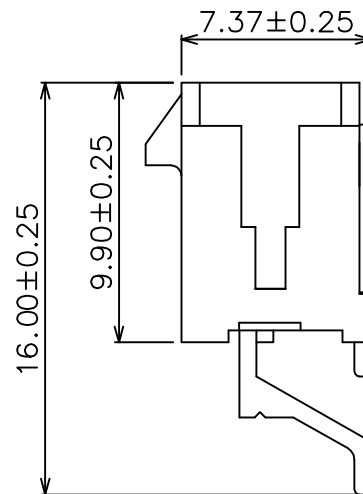

SPECIFICATIONS
Current Rating: 5A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -85°C ~ +105°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Mates with WSD C3030HF series dual Row Housing
Material and Finish
Insulator: High Temp. Plastic (UL94V-0)
Insulator Color: Black
Contact: Copper Alloy
Finish: Tin Plated

PIN NO.	Dimension	
	A	B
02	---	6.65
04	3.0	9.65
06	6.0	12.65
08	9.0	15.65
10	12.0	18.65
12	15.0	21.65
14	18.0	24.65
16	21.0	27.65
18	24.0	30.65
20	27.0	33.65
22	30.0	36.65
24	33.0	39.65

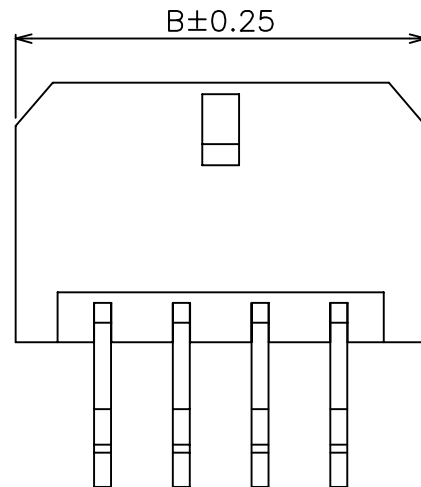

Part number Information:

DW-WF-2 30068WRnP-31 XX - XX

Dual Row
Pitch 3.00mm
Total PINS
Connector Plating
01: Gold Flash
03: 3u" Gold
06: 6u" Gold
15: 15u" Gold
30: 30u" Gold
31: Sn
32: Ni
TR: TR: Tape Reel
TB: Tube package
Housing Material
01: LCP
02: PA9T

						Angle	±2°	DESIGN	Aple	2026.06.23		 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co., Ltd
						X.X	±0.30	CHECK	Jason	2026.06.23		
						X.XX	±0.20	APPROVAL	Rix	2026.06.23		
						X.XXX	±0.10					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT: mm	A4	SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION