


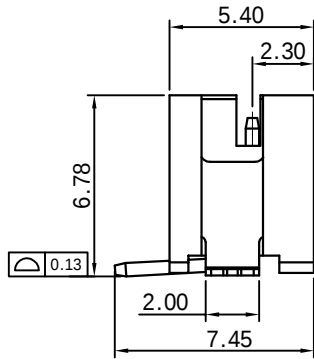
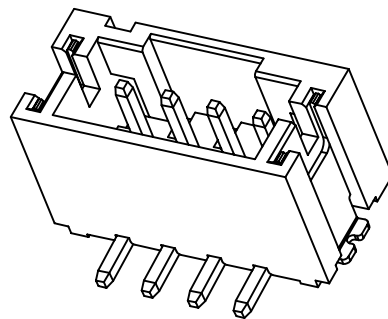
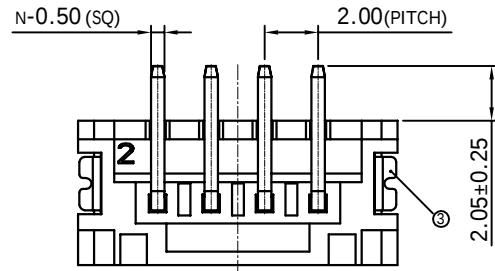
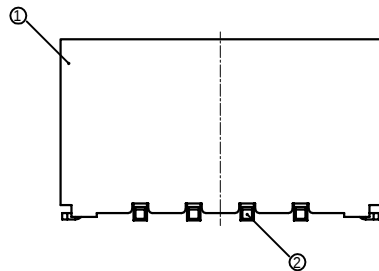


RoHS COMPLIANT

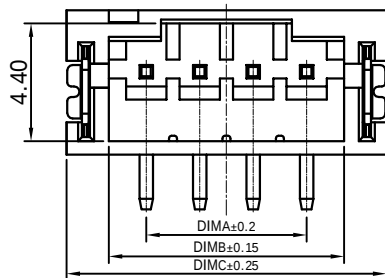

WITH COVER

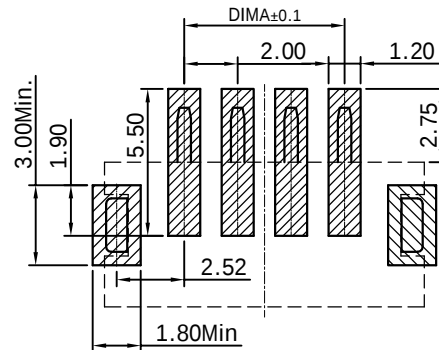

Recommended PCB Layout
Total Tolerance: ±0.05mm

Specifications

Current Rating: 2A AC/DC
Voltage Rating: 100V AC/DC
Insulation Resistance: 1000M Ω Min.
Withstanding Voltage: 800V AC/Minute.
Contact Resistance: 25m Ω Max.
Operating Temperature: -25°C to +85°C

Materials

Contact :Copper Alloy
Insulation Material: LCP, UL 94V-0, Natural
Solder termian: Copper Alloy, Tin plating

PIN NO.	DIMENSIONS		
	A	B	C
02	2.00	4.80	7.95
03	4.00	6.80	9.95
04	6.00	8.80	11.95
05	8.00	10.80	13.95
06	10.00	12.80	15.95
07	12.00	14.80	17.95
08	14.00	16.80	19.95
09	16.00	18.80	21.95
10	18.00	20.80	23.95
11	20.00	22.80	25.95
12	22.00	24.80	27.95
13	24.00	26.80	29.95
14	26.00	28.80	31.95
15	28.00	30.80	33.95
16	30.00	32.80	35.95
17	32.00	34.80	37.95
18	34.00	36.80	39.95
19	36.00	38.80	41.95
20	38.00	40.80	43.95

Part number Information:

DW-WF-1 20060WVnP-31 TR -05
Single Row
Pitch 2.00mm
Total PINS
Connector Plating
01:Gold Flash
03:3u" Gold
06:6u" Gold
15:15u" Gold
30:30u" Gold
31:Sn
32:Ni
TR:TR:Tape Reel
Series
01~99

						Angle	±2°	DESIGN	Aple	2015.10.23		 Dragon Well Ele Dragon Well Electronics Co.,Ltd TITLE: 2.00mm SMT 180° Wafer MODEL NO. DW-WF-120060WVnP-31TR-05 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
						X.X	±0.30	CHECK	Jason	2015.10.23		
						X.XX	±0.20	APPROVAL	Rix	2015.10.23		
						X.XXX	±0.10					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	
	A-0	2015.10.23	NEW	Aple	Rix	X.XXX ±0.10						