

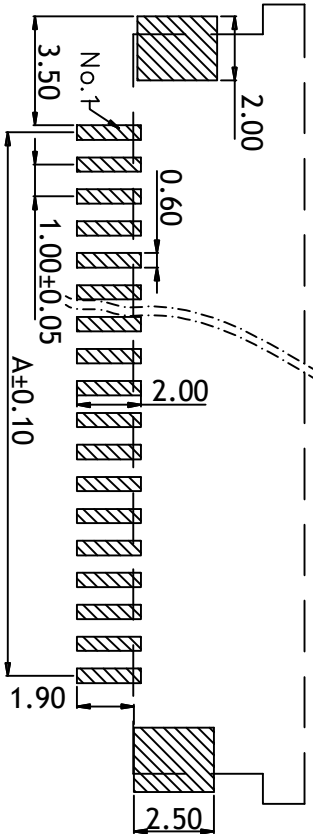
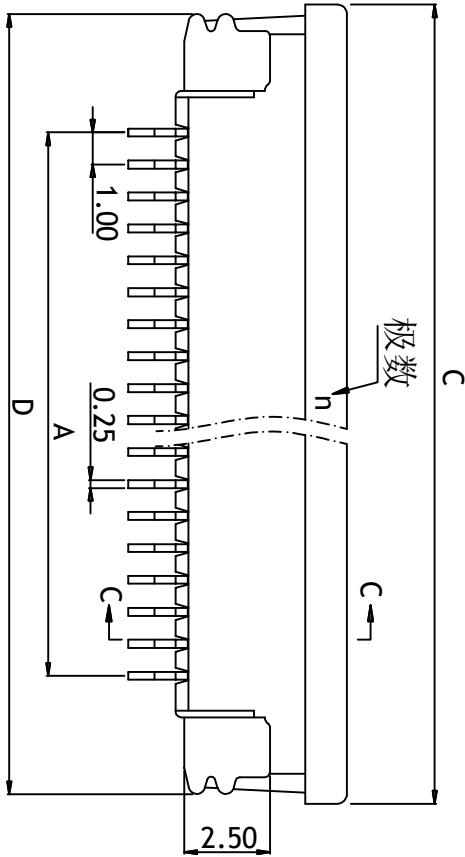
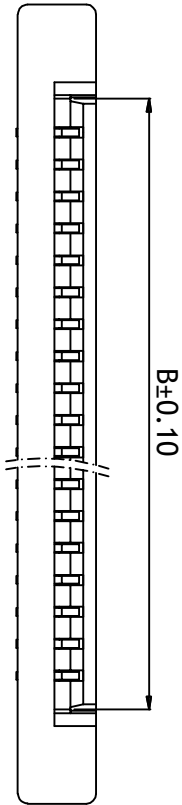



ROHS COMPLIANT



RECOMMENDED P.C.B. LAYOUT
ALL TOLERANCES ARE±0.05

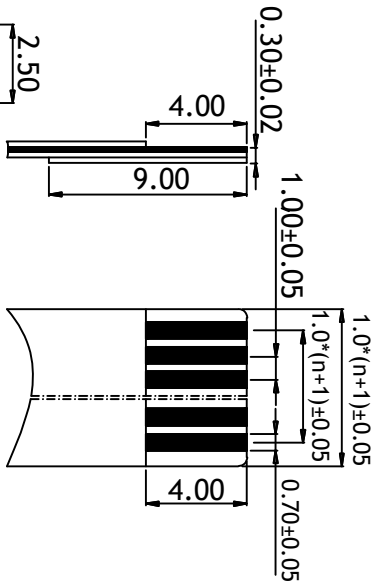

适用电缆

SPECIFICATION:

CURRENT RATING: 0.5A
VOLTAGE: 50 V
WITHSTANDING VOLTAGE: 500V DC
CONTACT RESISTANCE: ≤50mΩ
INSULATION RESISTANCE: 100MΩ
OPERATING TEMPERATURE: -20℃~+85℃
HOUSING: LCP, UL94V-0
LOCK: LCP, UL94V-0
TERMINAL: PHOSPHOR BRONZE,
TIN-Plated
SOLDERING PIN: PHOSPHOR BRONZE,
TIN-Plated

孔位	A	B	C	D
4	3	5.15	11.1	10.2
5	4	6.15	12.1	11.2
6	5	7.15	13.1	12.2
7	6	8.15	14.1	13.2
8	7	9.15	15.1	14.2
9	8	10.15	16.1	15.2
10	9	11.15	17.1	16.2
11	10	12.15	18.1	17.2
12	11	13.15	19.1	18.2
13	12	14.15	20.1	19.2
14	13	15.15	21.1	20.2
15	14	16.15	22.1	21.2
16	15	17.15	23.1	22.2
17	16	18.15	24.1	23.2
18	17	19.15	25.1	24.2
19	18	20.15	26.1	25.2
20	19	21.15	27.1	26.2
21	20	22.15	28.1	27.2
22	21	23.15	29.1	28.2
23	22	24.15	30.1	29.2
24	23	25.15	31.1	30.2
25	24	26.15	32.1	31.2
26	25	27.15	33.1	32.2
27	26	28.15	34.1	33.2
28	27	29.15	35.1	34.2
29	28	30.15	36.1	35.2
30	29	31.15	37.1	36.2
31	30	32.15	38.1	37.2
32	31	33.15	39.1	38.2
33	32	34.15	40.1	39.2
34	33	35.15	41.1	40.2
35	34	36.15	42.1	41.2

Part number Information:

1.0K-ES-nP WB

Pitch 1.0mm

E:E-Type

Total PINS

WB:SMD

龍威電子有限公司
Dragon Well Ele
Dragon Well Electronics Co.,Ltd

Angle	±2°	DESIGN	Aple	2015.07.09	
X.	±0.3	CHECK	Jason	2015.07.09	
.X	±0.25				
.XX	±0.20	APPROVAL	Rix	2015.07.09	
.XXX	±0.10				
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
			NEW	Michael	Rix
GENERAL TOLERANCE UNLESS OTHERWISE NOTED					
SCALE: N/A UNIT:mm A4					
SHEET: 1 of 1					
MODEL NO. 1.0K-ES-nPWB					
TITLE: 1.0mm PFC (E-Type)Top-contact (H=0.25)					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO Dragon Well AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					