



RoHS COMPLIANT

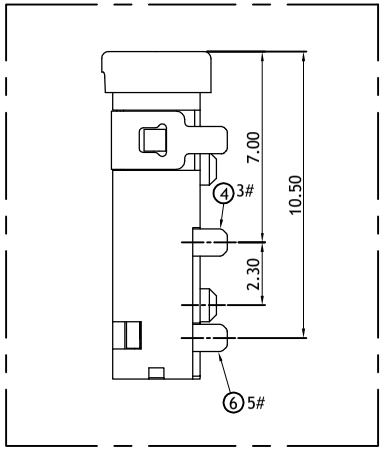




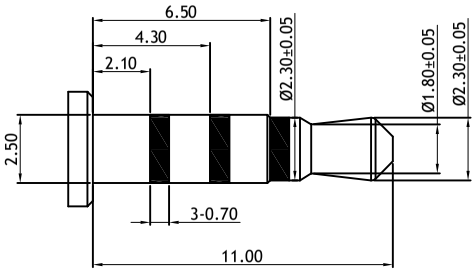



Ø2.50mm 4 POLE PLUG

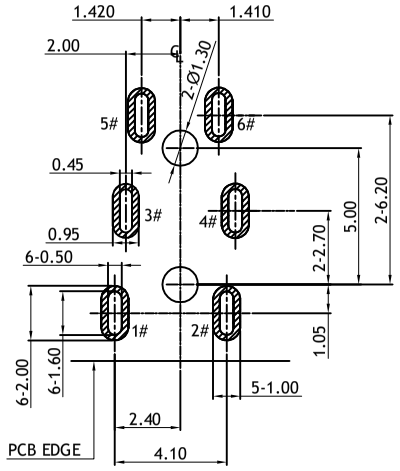



RECOMMENDED P.C.B LAYOUT(t=1.0mm)
TOP VIEW (TOLRANCE:±0.05)

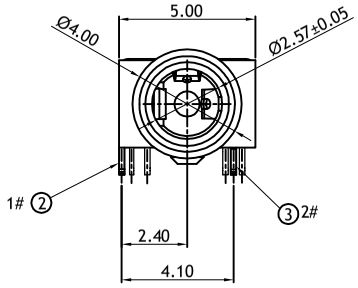

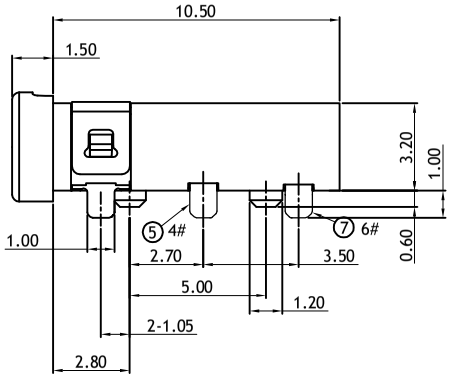



SPECIFICATION
1.Current Rating： DC 0.5A Max；
2.Voltage Rating： 12V AC RMS；
3.Contact resistance： 50mΩ Max.(Initial)
100mΩ Max.(After life test)；
4.Insulation resistance:50MΩ Min at 500v DC.
5.Withstand voltage： 500VAC ；
6.Insertion force:29.4N Max.;
Unmating force： 2.94N Max.；
7.life test： 5,000 cycles

SCHEMATIC	
DW-PJ-D2066-A	DW-PJ-D2066-B
	

NO.	PART NAME	QTY	MATERIAL	DESCRIPTION	REMARK
⑦	Terminal-6 [6]	1	COPPER ALLOY	ALL G/F OVER NICKEL 40u" MIN.	T=0.20mm
⑥	Terminal-5 [5]	1	COPPER ALLOY		T=0.20mm
⑤	Terminal-4 [4]	1	COPPER ALLOY		T=0.20mm
④	Terminal-3 [3]	1	COPPER ALLOY		T=0.15mm
③	Terminal-2 [2]	1	COPPER ALLOY		T=0.20mm
②	Terminal-1 [1]	1	COPPER ALLOY		T=0.20mm
①	Housing	1	HIGH TMEP	Black	UL94V-0

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
———	A-0	2017.03.09	New	Aple	Rix

GENERAL TOLERANCE UNLESS OTHERWISE NOTED

Angle	±5°
X.	±0.50
X.X	±0.30
X.XX	±0.15
X.XXX	±0.10

DESIGN	Aple	2017.03.09
CHECK	Jason	2017.03.09
APPROVAL	Rix	2017.03.09

SCALE: N/A UNIT:mm A4 SHEET: 1 of 1

龍威電子有限公司
Dragon Well Ele Dragon Well Electronics Co.,Ltd

TITLE:	PHONE JACK φ2.5mm 板上DIP 型
MODEL NO.	DW-PJ-D2066-X

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETAPY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION