


RoHS COMPLIANT

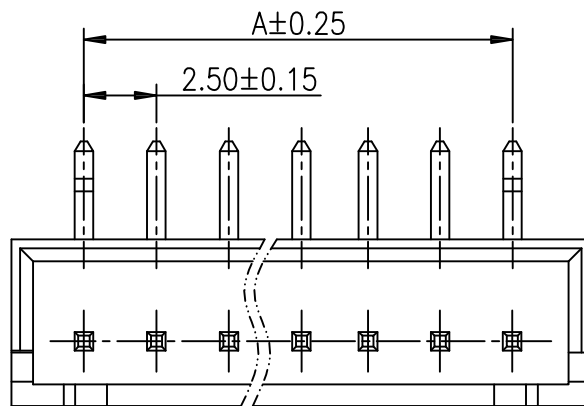

Specifications

Current Rating: 3A AC,DC

Voltage Rating: 250V AC,DC

Insulation Resistance: 1000M Ω Min.

Withstanding Voltage: 1000V AC/Minute.

Contact Resistance: 20m Ω Max.

Operating Temperature:-25°C to +85°C


Materials

Terminal:Brass

Insulation Material: Nylon 66 UL 94V-0

Color White

Plating: Tin Plating

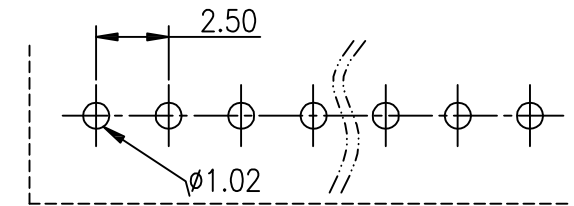

RECOMMENDED P.C.B.LAYOUT



ALL TOLERANCES ARE $\pm$ 0.05


Poles.	A	B	Poles.	A	B
02	2.50	7.50	10	22.5	27.5
03	5.00	10.0	11	25.0	30.0
04	7.50	12.5	12	27.5	32.5
05	10.0	15.0	13	30.0	35.0
06	12.5	17.5	14	32.5	37.5
07	15.0	20.0	15	35.0	40.0
08	17.5	22.5	16	37.5	42.5
09	20.0	25.0			

Part number Information:

DW-WF-1 25078WRnP-XX PE - 01

Single Row
Pitch 2.50mm
Total PINS
Connector Plating
01:Gold Flash
03:3u" Gold
06:6u" Gold
15:15u" Gold
30:30u" Gold
31:Sn
32:Ni
PE:PE Bag
ISeries
01-99

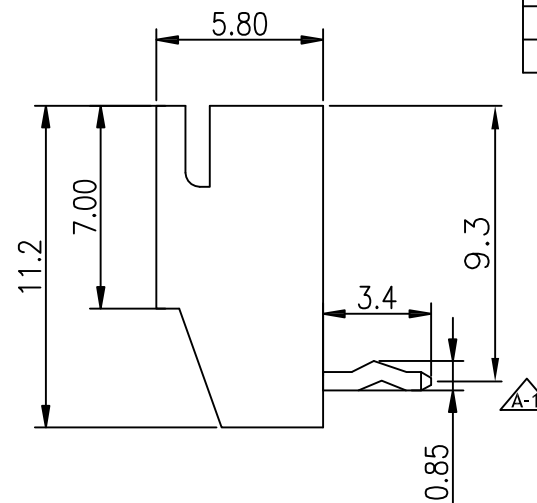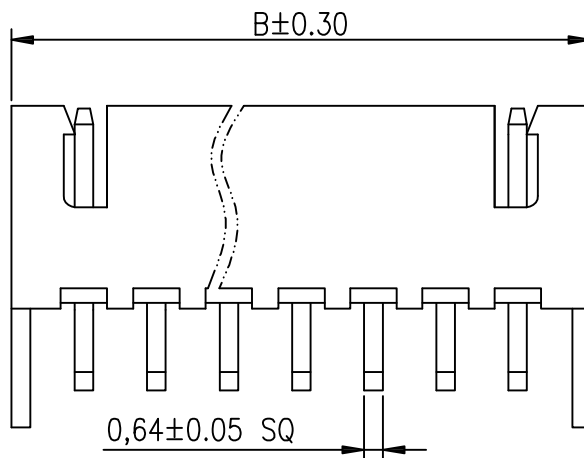

						Angle	$\pm 2^\circ$	DESIGN	Aple	2018.06.27		 龍威電子有限公司 Dragon Well Ele Dragon Well Electronics Co.,Ltd
						X.X	± 0.30	CHECK	Jason	2018.06.27		
	A-1	2018.06.27	Updated spec	Aple	Rix	X.XX	± 0.20	APPROVAL	Rix	2018.06.27		
	A-0	2015.07.28	NEW	Aple	Rix	X.XXX	± 0.10					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION