
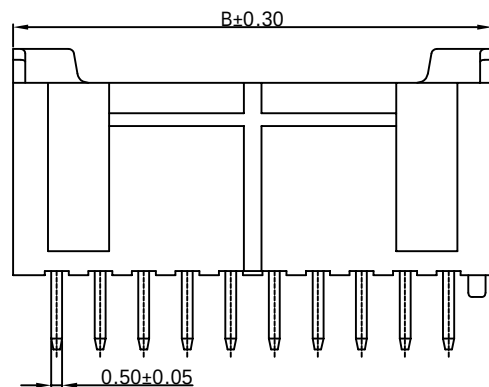
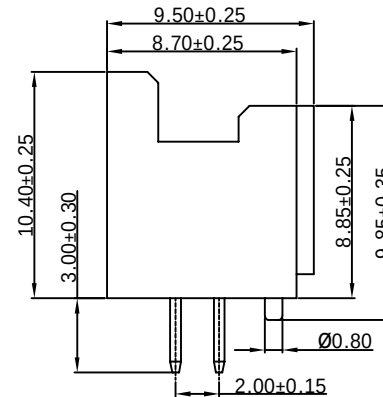
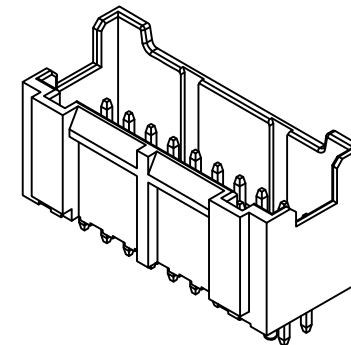
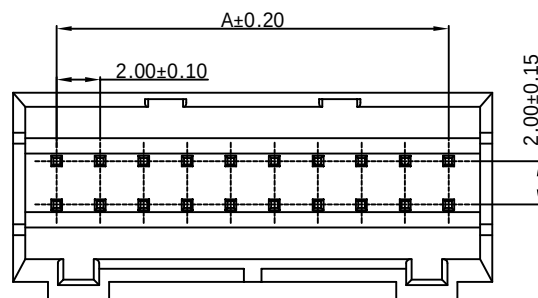


RoHS COMPLIANT

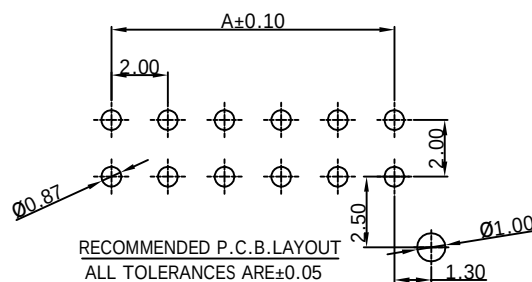

Current rating:3A AC,DC
Voltage rating:250V AC,DC
Temperature range:-25℃~+85℃
Contact resistance:20mΩMax.
Insulation resistance:1000MΩMin.
Withstanding voltage:800V AC/minute
Material:Brass/Tin over Nickel
Insulator:Nylon 46,UL94V-0(Ivory)

Part number Information:

DW-WF-2 200331WVnP-31 XX -01
Dual Row
Pitch 2.00mm
Total PINS
Connector Plating
01:Gold Flash
03:3u" Gold
06:6u" Gold
15:15u" Gold
30:30u" Gold
31:5n
32:Ni
PE:PE Bag
TP:Tray Packing
I Series
01-99

Circuits	Dimensions	
	A	B
04	2.00	6.00
06	4.00	8.00
08	6.00	10.00
10	8.00	12.00
12	10.00	14.00
14	12.00	16.00
16	14.00	18.00
18	16.00	20.00
20	18.00	22.00
22	20.00	24.00
24	22.00	26.00
40	38.00	42.00

						Angle	±2°	DESIGN	Aple	2018.06.26	 Dragon Well Ele 龍威電子有限公司 Dragon Well Electronics Co.,Ltd		
						X.X	±0.35	CHECK	Jason	2018.06.26			
						X.XX	±0.30						
						X.XXX	±0.20	APPROVAL	Rix	2018.06.26			
	A-0	2018.06.26	NEW	Michael	Rix						TITLE:	2.00mm PITCH DUAL ROW WAFER直針	
											MODEL NO.	DW-WF-2200331WVnP-31XX-01	
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4		SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION