



RoHS COMPLIANT

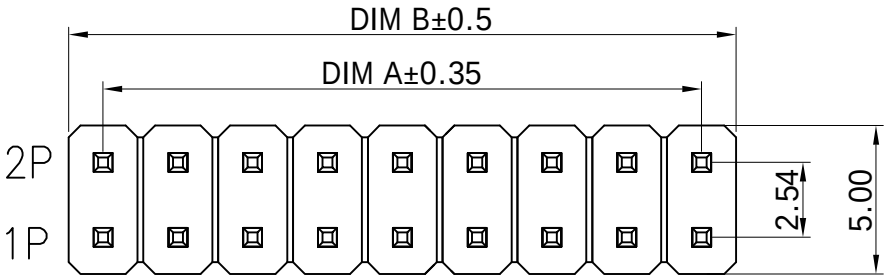

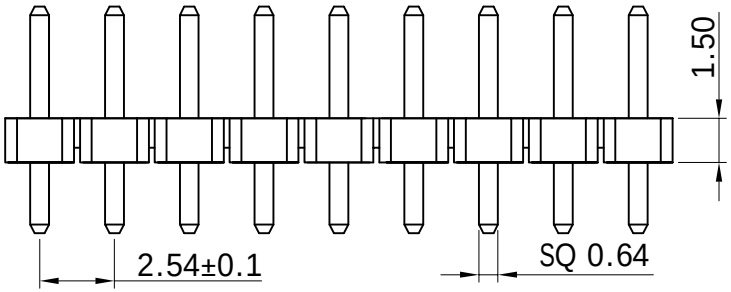

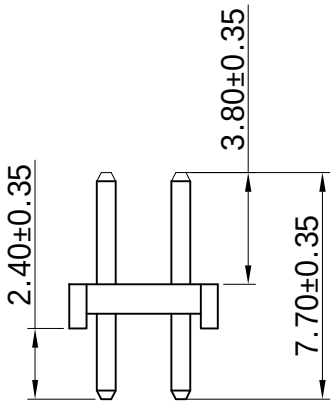

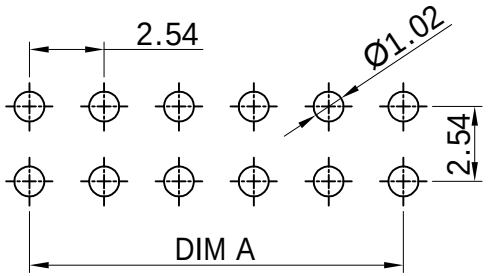

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE±0.05

Part number Information:

DW-PH-2 254 866 WV nP-XX PE -01

- Dragon Well
- Pin Header
- Dual Row
- Pitch 2.54mm
- Series No.
- WV:Vertical 180°
  WR:Right Angel 90°
- Total PINS
- 01:Gold Flash
  03:3u" Gold
  06:6u" Gold
  15:15u" Gold
  30:30u" Gold
  31:Sn
  32:Ni
- PE:PE Bag
- Series: 01~99

规格/Specifications:
额定电流/Current Rating:3.0A AC/DC
额定电压/Voltage Rating:250V AC/DC
接触阻抗/Contact Resistance:20m ohm.Max.
绝缘阻抗/Insulation Resistance:1000M ohm.Min.
耐电压值/Withstanding Voltage:500V AC/ Minute
温度范围/Operating Temperature Range:-40℃ To +105℃

材料及处理/Materials and Finish:
绝缘材质/Insulator:PA6T(UL94V-0)
绝缘颜色/Insulator Color:Black
金属材质/Contact:Copper Alloy
金属处理/Metal Treatment:
bottom Nickel Plating 50u" Min
sue Gold plati

Pin No.	DIM A	DIM B
04	2.54	5.08
06	5.08	7.62
08	7.62	10.16
10	10.16	12.70
12	12.70	15.24
14	15.24	17.78
16	17.78	20.32
18	20.32	22.86
20	22.86	25.40
22	25.40	27.94
24	27.94	30.48
26	30.48	33.02
28	33.02	35.56
30	35.56	38.10
32	38.10	40.64
34	40.64	43.18
36	43.18	45.72
38	45.72	48.26
40	48.26	50.80

Pin No.	DIM A	DIM B
42	50.80	53.34
44	53.34	55.88
46	55.88	58.42
48	58.42	60.96
50	60.96	63.50
52	63.50	66.04
54	66.04	68.58
56	68.58	71.12
58	71.12	73.66
60	73.66	76.20
62	76.20	78.74
64	78.74	81.28
66	81.28	83.82
68	83.82	86.36
70	86.36	88.90
72	88.90	91.44
74	91.44	93.98
76	93.98	96.52
78	96.52	99.06
80	99.06	101.60

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
———	A-0	2019.09.13	NEW	Aple	Rix

Angle	±2°
X.	±0.45
X.X	±0.35
X.XX	±0.25
X.XXX	±0.15

GENERAL TOLERANCE UNLESS OTHERWISE NOTED

DESIGN	Aple	2019.09.13
CHECK	Jason	2019.09.13
APPROVAL	Rix	2019.09.13

SCALE: N/A UNIT:mm A4 SHEET: 1 of 1

龍威電子有限公司
Dragon Well Ele Dragon Well Electronics Co.,Ltd

TITLE: 2.54 PIN HEADER DUAL ROW DIP TYPE BASE 1.5H

MODEL NO. DW-PH-2254866WVNP-XXPE-01

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETAPY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION