
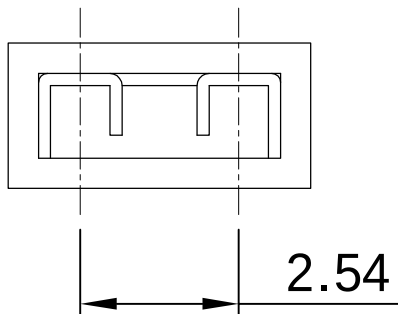
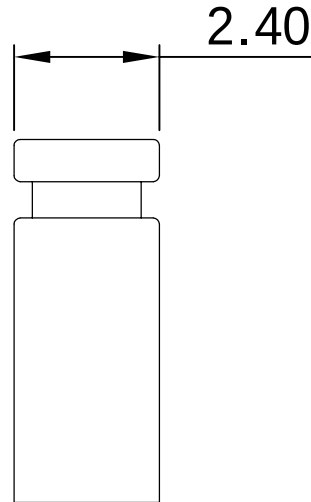


RoHS COMPLIANT

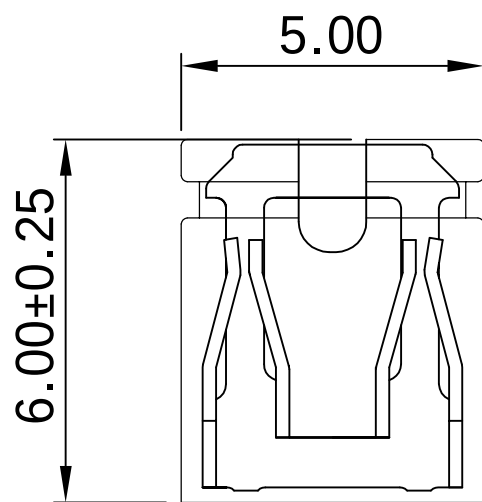

技术参数/Technical parameters

额定电流/Current Rating	:3AMP
绝缘阻抗/Insulator Resistance	:1000MΩ Min.
接触阻抗/Contact Resistance	:20mΩ Max.
耐电压值/Voltage Resistance	:AC 500V
工作温度/Operating Temperature	:-40℃ ~ +105℃
金属材料/Metallic Material	:Bronze
金属处理/Metal Treatment	:Ni(30~50u")+Au(0.5~0.8u")
绝缘材料/Insulator Material	:PBT G.F UL94V-0

Part number Information:

DW-FH-1 254 365 WV 02P-XX PE - 01	
Dragon Well	Series(ECN No.) 01-99
Female Header	
Single Row	
Pitch 2.54mm	
Series No.	PE:PE Bag
(01-99)	Plating
WV:Vertical 180 °	01:Gold Flash
WR:Right Angel 90 °	03:3u" Gold
	06:6u" Gold
	15:15u" Gold
	30:30u" Gold
	31:Sn
	32:Ni
PINS	

						Angle	±2°	DESIGN	Aple	2018.05.13		 龍威電子有限公司		
						X.	±0.45	CHECK	Jason	2018.05.13		Dragon Well Ele Dragon Well Electronics Co.,Ltd		
						X.X	±0.35		APPROVAL	Rix	2018.05.13		TITLE:	MJ2.54 1P H6.0 开口
						X.XX	±0.30	MODEL NO.					DW-FH-1254365WV02P-XXPE-01	
						X.XXX	±0.15							
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4		SHEET: 1 of 1	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	