

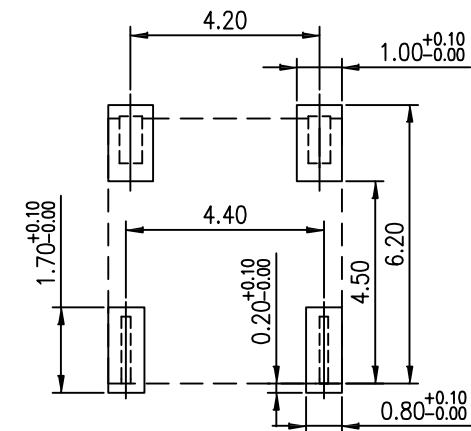
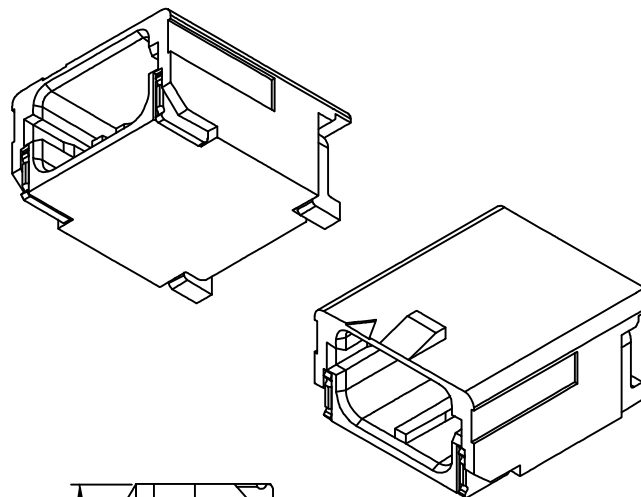
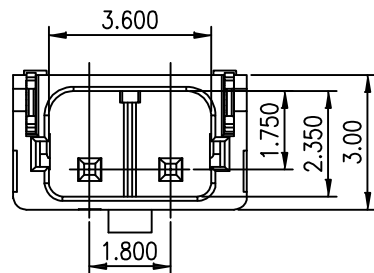



RoHS COMPLIANT

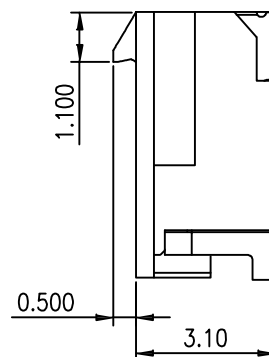

Recommended P.C.Board Layout
General Tolerance±0.05

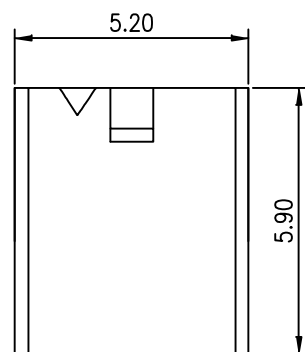

Specifications
Voltage Rating:250V AC DC
Current Rating: 3.0A AC DC
Insulation Resistance:1000MΩ Min.
Dielectric Withstanding:1000V AC/ minute.
Contact Resistance:30mΩ Max.
Operating Temperature:-25°C to +85°C
Materials
Contact Material: Brass Tin-Plated
Insulator Material: LCP, UL 94V-0

Part number Information:

DW-WF-1 180123WV02P-31 XX - XX
Single Row
Pitch 1.80mm
Total PINS
Connector Plating
01:Gold Flash
03:3u" Gold
06:6u" Gold
15:15u" Gold
30:30u" Gold
31:Sn
32:NI
TR:Tape Reel
TP:Tray Packing
Insulator Material Color
01:Black
02:Natural
03:Yellow
04:Red



						Angle	±2°	DESIGN	Aple	2020.03.03		 Dragon Well Ele 龍威電子有限公司 TITLE: 1.80 PITCH Crimp Style Wafer MODEL NO. DW-WF-1180123WV02P-31XX-XX THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION
						X.X	±0.35	CHECK	Jason	2020.03.03		
	A-1	2020.03.03	Updated spec	Michael	Rix	X.XX	±0.3	APPROVAL	Rix	2020.03.03		
	A-0	2017.11.28	New	Michael	Rix	X.XXX	±0.15					
ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.	GENERAL TOLERANCE UNLESS OTHERWISE NOTED		SCALE: N/A	UNIT:mm	A4	SHEET: 1 of 1	