RoHS COMPLIANT

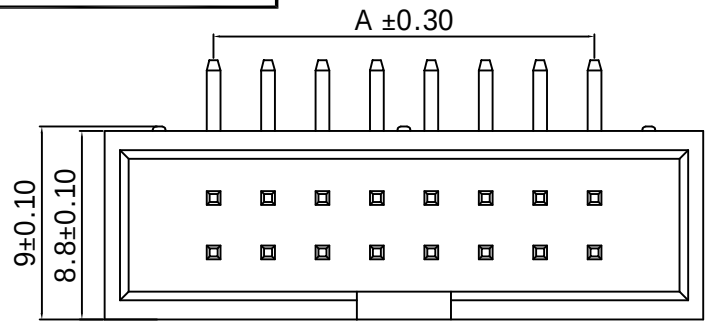

Ñ 技术参数/Technical parameters

1 符合规范/Accord With Norm :EIA-364C
2 额定电流/Current Rating :3AMP
3 绝缘阻抗/Insulator Resistance :1000MΩ Min.
4 接触阻抗/Contact Resistance :20mΩ Max.
5 耐电压值/Voltage Resistance :AC 500V
6 工作温度/Operating Temperature :-40℃ To +105℃
7 金属材料/Metallic Material :H65 Brass
8 金属处理/Metal Treatment :Ni(30"~50u")+ Au0.5~0.8u"
2 绝缘材料/Insulator Material :PA6T 30%GF UL94V-0
2 耐焊接热/Resistance To Soldering Heat :260°C ±5°C 10S MAX

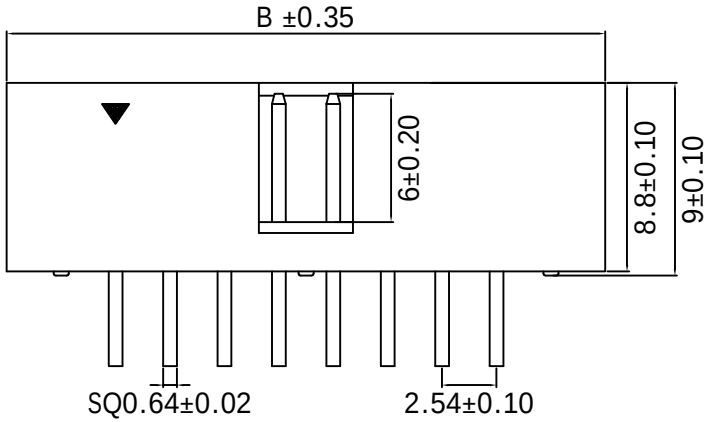

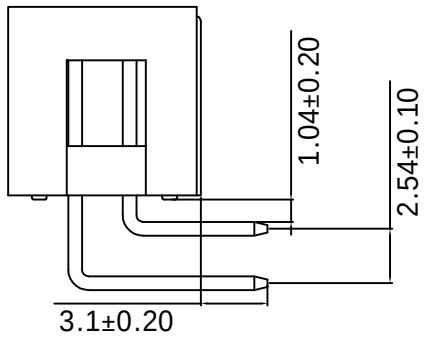

PIN No.	DIM A	DIM B
06	5.08	15.24
08	7.62	17.78
10	10.16	20.32
12	12.70	22.86
14	15.24	25.40
16	17.78	27.94
18	20.32	30.48
20	22.86	33.02
22	25.40	35.56
24	27.94	38.10
26	30.48	40.64
30	35.56	45.72
34	40.64	50.80
36	43.18	53.34
40	48.26	58.42
44	53.34	63.50
50	60.96	71.12
60	73.66	83.82
64	78.74	88.90

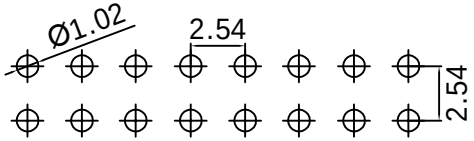

RECOMMENDED P.C.B.LAYOUT
ALL TOLERANCES ARE±0.05

Part number Information:

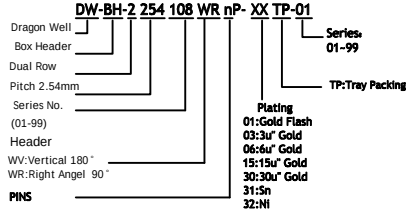

ECN NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO.
	A-0	2019.08.23	NEW	Aple	Rix

GENERAL TOLERANCE UNLESS OTHERWISE NOTED	
Angle	±2°
X.	±0.45
X.X	±0.35
X.XX	±0.25
X.XX	±0.10

DESIGN	Aple	2019.08.23	
CHECK	Jason	2019.08.23	
APPROVAL	Rix	2019.08.23	

SCALE: N/A UNIT:mm A4 SHEET: 1 of 1

龍威電子有限公司
Dragon Well Ele Dragon Well Electronics Co.,Ltd

TITLE: 2.54 BOX HEADER 90° DIP TYPE
MODEL NO. DW-BH-2254108WRnP-XXTP-01

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETAPY TO DRAGON WELL AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION